

REV.	ECN NO.	ADDP.
H	1514013	Joseph Chau 8/17/2014

FEATURE:

INSULATOR
Glass-Filled P.B.T. is 94V-0 rated
CONTACT
Phosphor Bronze selective gold plating
over nickel



SPECIFICATION:

Current Rating : 3 amperes
Contact Resistance : 20 miniohms max.
Operation Temperature : -55° c to +105° c
Voltage Rating : 800 VAC 1 minute
Insulation Resistance : 5000 megaohms min.
Insertion Force : 412 grams max. per pair
Withdrawal Force : 32 grams min. per pair

NOTE:

ORDERING INFORMATION

ex
SERIES NO. CONTACTS NO. TAIL LENGTH. ROW TO ROW DIN.

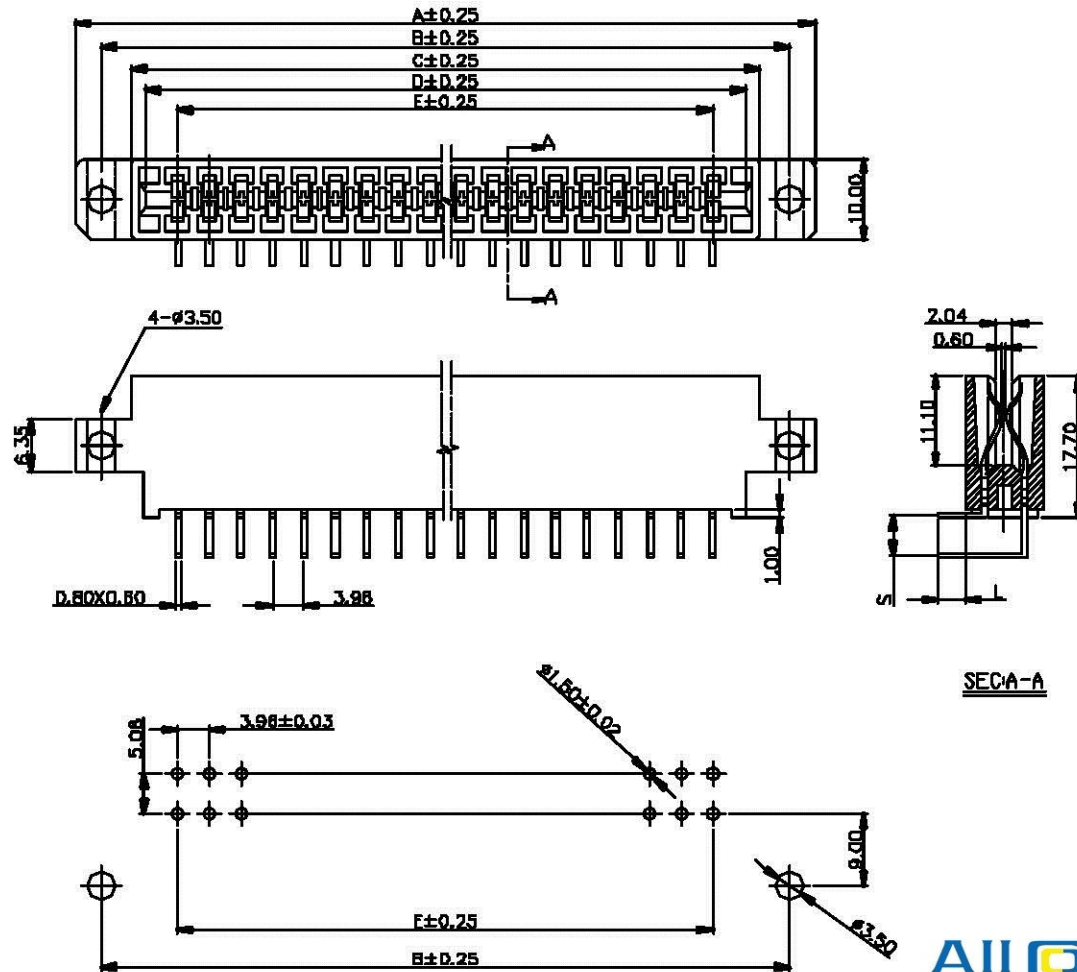

CONTACTS NO.	DIM A	DIM B	DIM C	DIM D	DIM E
18/36	93.02	86.62	79.02	75.72	67.32
20/40	100.94	94.54	86.94	83.64	75.24
22/44	108.86	102.46	94.86	91.56	83.16
28/56	132.62	126.22	118.62	115.32	106.92
30/60	140.54	134.14	126.54	123.24	114.84
43/86	192.02	185.62	178.02	174.72	166.32
50/100	219.74	213.34	205.74	202.44	194.04

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filanderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25

TAIL LENGTH	L	ROW TO ROW	S
A	3.10	A	5.08
B	3.50	B	3.96

X ₂ 1.10	X ₂ 1.38	XX ₂ 1.25	NAME (INTENDED USE)
X ₁	X ₁	XX ₁	EDGE CARD CONN.
UNITS: mm	DATE: 8/1/2014	PART NO. (INTENDED USE)	TITLE:
MATL:	CONTACT: PHOSPHOR BRONZE	4200 SERIES	EDGE CONNECTOR 3.96mm PITCH
HOUSING: P.B.T. UL94V-0	HOUSING: P.B.T. UL94V-0	APDP: Joseph Chau	WITH MID-HIGH R/A MOUNTING BEARS
		ARRD: Ching-Yi Yu	R/A TYPE
		DR: Zi.Hsiang.Chen	DWG NO. 010-0010-542
			SCALE: N/A
			SHEET: 1/1
			REV: H