

## NOTES

### \*Material:

Body: LCP, UL 94V-0 Rated. Color:Black

Contacts: Brass.

Plating: Gold Plating Over Nickel on Contact Area; Tin Plating on Solder Tail

### \*Mechanical:

Insertion Force: 0.74N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 3.92N min per contact;

### \*Electrical Specification

Contact Resistance : 30 Milliohms Max.


Current Resistance : 1.7 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.

Operating Temperature : -40°C to +105°C

E08-VPC-xxx-LF  
LEADFREE  
RoHS Compliant

項目 PIN	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'
40P	15.20	17.35	20.60	18.20	17.20
60P	23.20	25.35	28.60	26.20	25.20
70P	27.20	29.35	32.60	30.20	29.20

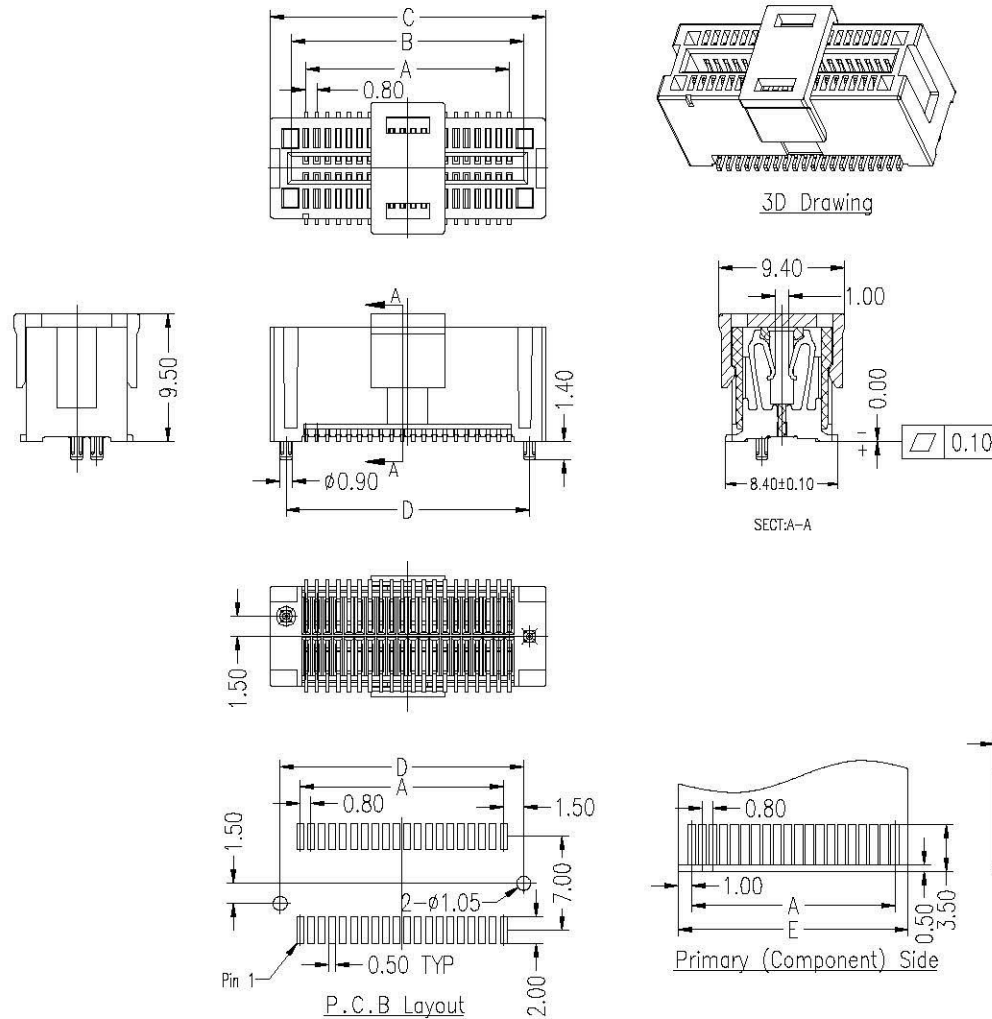

**Allconnectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettenerstr. 25

PART NO. E08-VPC-xxx

DWG NO. E08-VPC-xxx

CHECKED BY CY

TOLERANCES ARE

.X±0.2  
.XX±0.1  
.XXX±  
AWG

DESCRIPTION: Edge Card Connector (SMT Type)

焜倫股份有限公司

FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE