

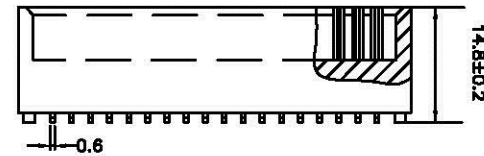


■ MATERIAL

- Insulator: Glass-Fiber NY-9T(UL94V-0)
- Contact: Phosphor Bronze (P) or Brass (B)
- Plating: Gold Plating Over Nickel.

■ SPECIFICATIONS

- Insulation Resistance: 5000 M $\Omega$  min at 500 VDC
- Dielectric Withstanding Voltage: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m $\Omega$  max
- Operating Temperature: -55 $^{\circ}$ C to 105 $^{\circ}$ C
- Insertion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

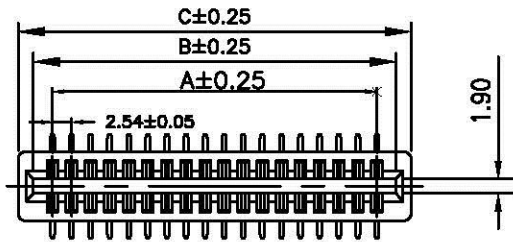

Circuits	A	B	C	Circuits	A	B	C
6	5.08	10.66	14.22	48	58.42	64.00	67.56
8	7.62	13.20	16.76	50	60.96	66.54	70.10
10	10.16	15.74	19.30	52	63.50	69.08	72.64
12	12.70	18.28	21.84	54	66.04	71.62	75.18
14	15.24	20.82	24.38	56	68.58	74.16	77.72
16	17.78	23.36	26.92	58	71.12	76.70	80.26
18	20.32	25.90	29.46	60	73.66	79.24	82.80
20	22.86	28.44	32.00	62	76.20	81.78	85.34
22	25.40	30.98	34.54	64	78.74	84.32	87.88
24	27.94	33.52	37.08	66	81.28	86.86	90.42
26	30.48	36.06	39.62	68	83.82	89.40	92.96
28	33.02	38.60	42.16	70	86.36	91.94	95.50
30	35.56	41.14	44.70	72	88.90	94.48	98.04
32	38.10	43.68	47.24	120	149.88	155.44	159.00
34	40.64	46.22	49.78				
36	43.18	48.76	52.32				
38	45.72	51.30	54.86				
40	48.26	53.84	57.40				
42	50.80	56.38	59.94				
44	53.34	58.92	62.48				
46	55.88	61.46	65.02				

GE-VX-xxx-LF  
LEADFREE  
006:6pin  
120:120pin

RoHS Compliant

All Connectors

www.allconnectors.de  
Tel.: 0049 711 7003503  
70794 Hilderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7003504  
Kettnerstr. 25

PART NO. GE-VX-xxx

DWG NO. GE-VX-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE