



SECTION:A-A

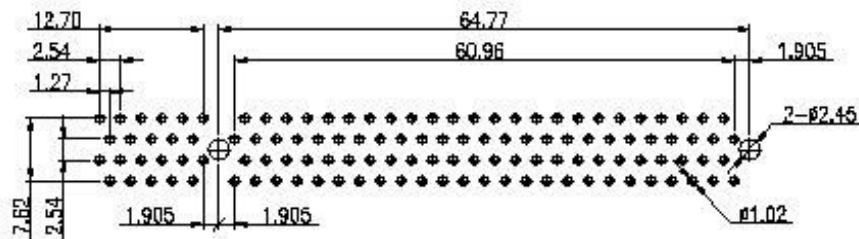

RECOMMENDED PCB LAYOUT

NOTE:
MATERIAL:
 HOUSING: THERMOPLASTIC (NYLON) UL 94V-0/UL 94V-2
 CONTACT: BRASS
 PLATING: MATING AREA-SELECTED GOLD OVER NICKEL
 SOLDER AREA-TIN OVER NICKEL
SPECIFICATION:
 VOLTAGE RATING: 250V
 CURRENT RATING: 1A
 CONTACT RESISTANCE TERMINAL: 30m Ω MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MIN
 INSULATION RESISTANCE: 1000M Ω MIN



All Connectors

www.allconnectors.de
 TEL: 0049 711 709553
 10784 Filbertstr. - Germany


info@allconnectors.de
 Fax: 0049 711 709554
 Kettnerstr. 25

RoHS Compliant


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/mm	SCALE 1:1
DATE	
SIZE A4	PROJECTION

TOLERANCES ARE

X ±
 XX ±
 XXX ±
 ANG ±



ORDER INFORMATION



DESCRIPTION: