


**MATERIAL**  
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC,  
 UL94V-0 RATED.  
 CONTACT: COPPER ALLOY.  
 PLATING: MATING AREA- GOLD OVER NICKEL,  
 SOLDER AREA- TIN OVER NICKEL.

**ELECTRICAL**  
 VOLTAGE RATING: 250 VAC RMS.  
 CURRENT RATING: 3 AMP.  
 INSULATION RESISTANCE: 1,000 MEGOHMS MIN.  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.



**MECHANICAL**  
 CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.  
 INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.  
 WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

**ENVIRONMENTAL**  
 TEMPERATURE RANGE: -55°C TO +85°C.  
 SOLDERABILITY : 260°C±5°C/10sec±1sec.


PCI-D-184V3-LF  
 LEADFREE  
 RoHS Compliant

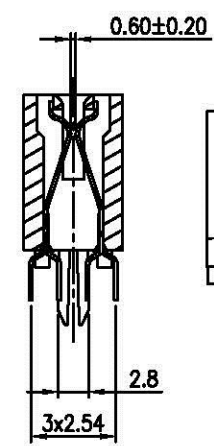

METAL CLIP

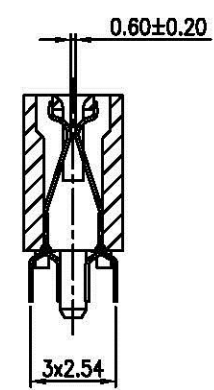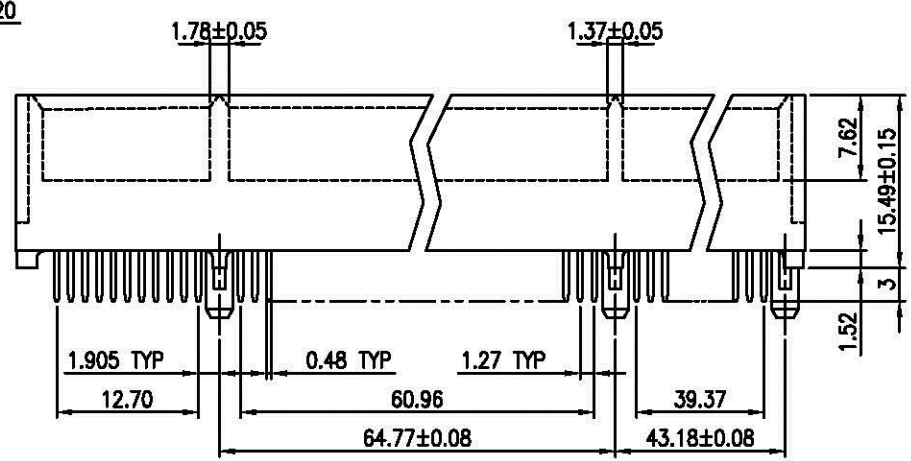

PLASTIC POST

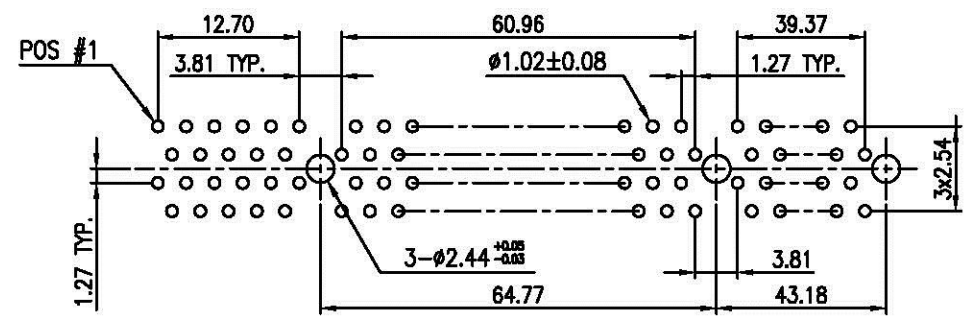

**All Connectors**

www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70724 Filsterstedt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettnerstr. 25

PART NO. PCI-D-184V3

DWG NO. PCI-D-184V3

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

SCALE 1:1

PROJECTION

TOLERANCES ARE

X ± 0.2

.XX ±

.XXX ±  
 AWG

DESCRIPTION: 64 BIT PCI CARDEDGE, 3.3V

AREA

REVISIONS

HK

DATE

DATE

DATE

DATE