




**MATERIAL**  
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC.  
 CONTACT: COPPER ALLOY.  
 PLATING: MATING AREA - SELECTED GOLD OVER NICKEL  
 SOLDER AREA - TIN/LEAD OVER NICKEL

**ELECTRICAL**  
 VOLTAGE RATING: 250 VAC RMS.  
 CURRENT RATING: 1 AMP.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC RMS 60Hz FOR 1 MINUTE.  
 INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 500 VDC.  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

**MECHANICAL**  
 RETENTION FORCE: 460 GRAMS MIN PER CONTACT.  
 INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.  
 WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR.

**ENVIRONMENTAL**  
 TEMPERATURE RANGE: -55°C TO +85°C.


POS. #1 INDICATOR

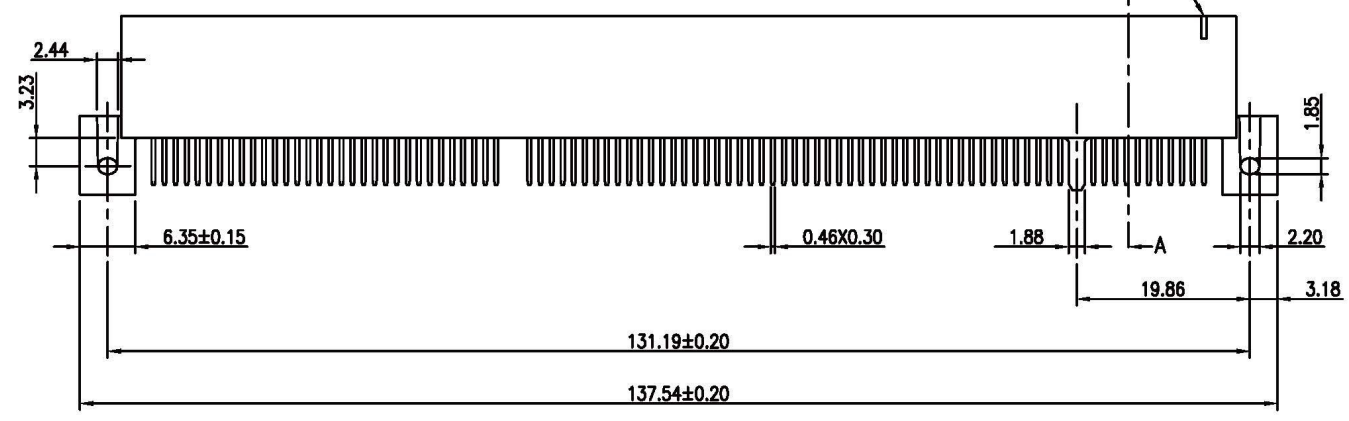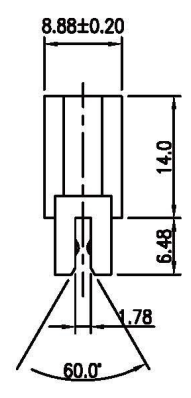

SECTION A-A

**All Connectors**  
 www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
 70794 Filderstadt - Germany Kettenerstr. 25

<b>RoHS Compliant</b>		TOLERANCES ARE
DRAWING BY	CY	X. ±
CHECKED BY	GENIUS	.X ±
UNIT/ mm	SCALE 1 : 1	.XX ±
DATE		.XXX ±
SIZE A4	PJECTION	ANG ±



**ORDER INFORMATION**

PCI-EF-184V3-LF

SERIES: PCI-EF-184V3-LF  
 EDGE CLIP  
 FLANGE  
 3.3V  
 184 WAY  
 LEADFREE

**DESCRIPTION: 64 BIT PCI CARDEDGE SLOT, STR. MOUNT , 3.3V**