


SECTION:A-A

NOTE:  
 MATERIAL:  
 HOUSING:THERMOPLASTIC(NYLON+GF)  
 CONTACT:BRASS  
 PLATING:  
 CONTACT: GOLD PLATING  
 SPECIFICATION:  
 VOLTAGE RATING: 50V  
 CURRENT RATING: 1.1A  
 CONTACT RESISTANCE TERMINAL:20mΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC  
 INSULATION RESISTANCE:1000MΩ MIN

PCIX-DLF-164-LF  
 LEADFREE  
 RoHS Compliant

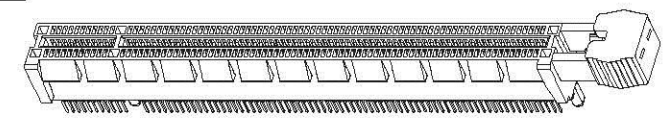

RECOMMENDED PCB LAYOUT

**All Connectors**

www.allconnectors.de  
 Tü.: 0019 711 7005503  
 70794 Filderstadt - Germany

Info@allconnectors.de  
 Fax.: 0049 711 7009504  
 Kette meistr. 25

PART NO. PCIX-DLF-164		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIPTION: PCI 1.0 164P 推拉式	AREA	REVISIONS	HK	DATE
DWG NO. PCIX-DLF-164		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								