
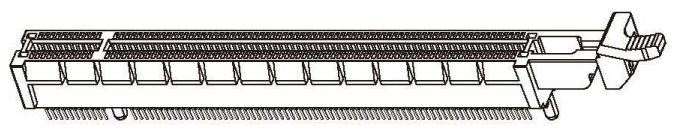
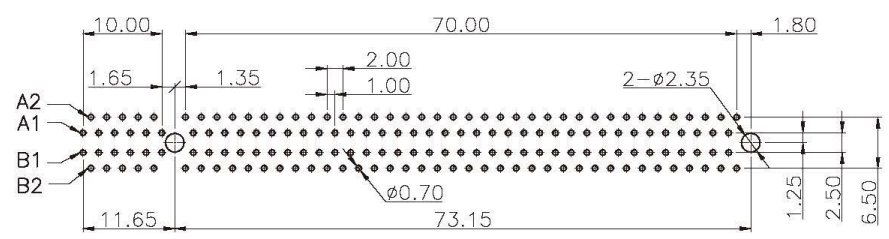

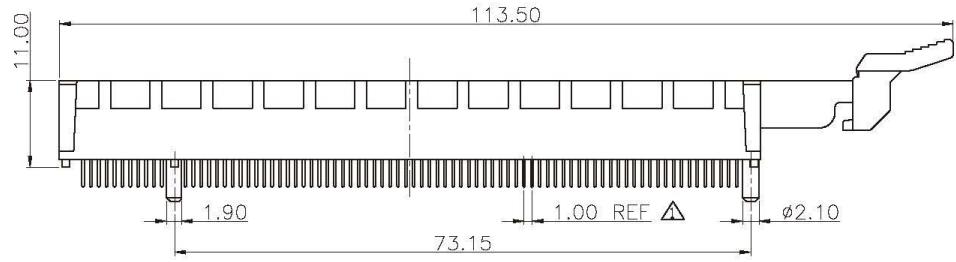



NOTE:  
 MATERIAL:  
 HOUSING: THERMOPLASTIC (NYLON+GF)  
 CONTACT: BRASS  
 PLATING:  
 CONTACT: GOLD PLATING  
 SPECIFICATION:  
 VOLTAGE RATING: 50V  
 CURRENT RATING: 1.1A  
 CONTACT RESISTANCE TERMINAL: 20mΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
 INSULATION RESISTANCE: 1000MΩ MIN

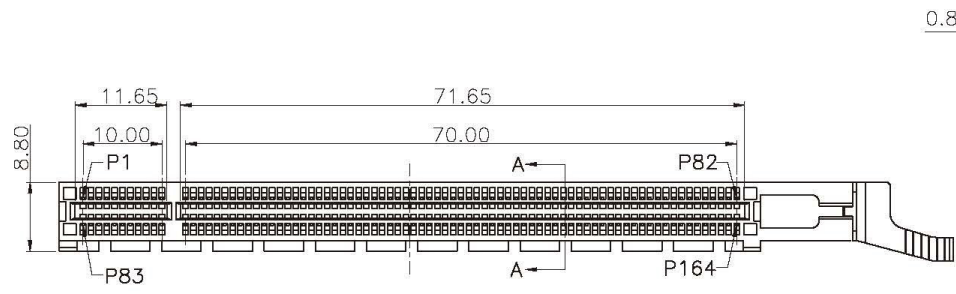


RECOMMENDED PCB LAYOUT

**All Connectors**  
 www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettenerstr. 25

<b>RoHS Compliant</b>		<b>TOLERANCES ARE</b>	
DRAWING BY CY		X ±	
CHECKED BY GENIUS		.X ± 0.30	
UNIT/ mm	SCALE 1:1	.XX ± 0.15	
DATE		.XXX ± 0.10	
SIZE A4	PJECTION	ANG ±	



**ORDER INFORMATION**

PCIX-DLP-164-LF

SERIES | DIP 180° | 164WAY | LEADFREE | PUSH LOCK

**DESCRIPTION: PCI 1.0 164P 旋轉式成品**