


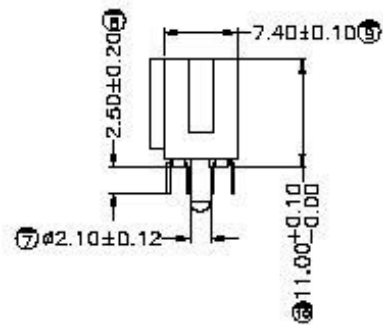


PIN数	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

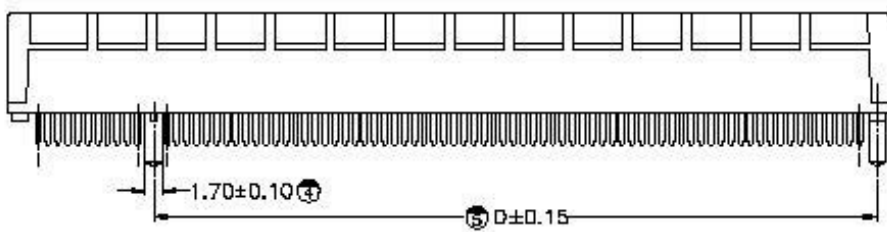


SECTION: A-A

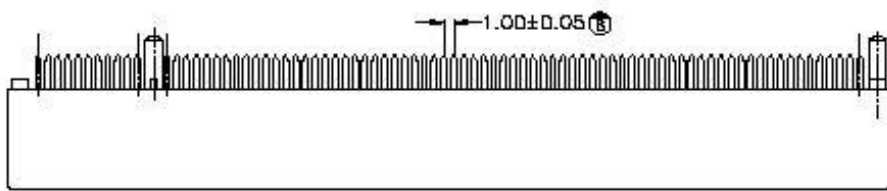


Notes:

- 1:Electical Performance
 - 1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.
 - 1.2.Contact Resistance:30mΩ Max
 - 1.3.insulation Resistance:1000MΩ Min
- 2.Mechanical Performance.
 - 2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.
 - 2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.
 - 2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.
- 3.Material & Finish:
 - 3.1.Housing: Glass Filled High Temperatuer Nylon, Black.
 - 3.2.Contact Plating: Tin Plating At Solder Tail Area; Gold Plating At Mating Area, All Over Nickel Plating.
- 4.Environmental:Operating Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

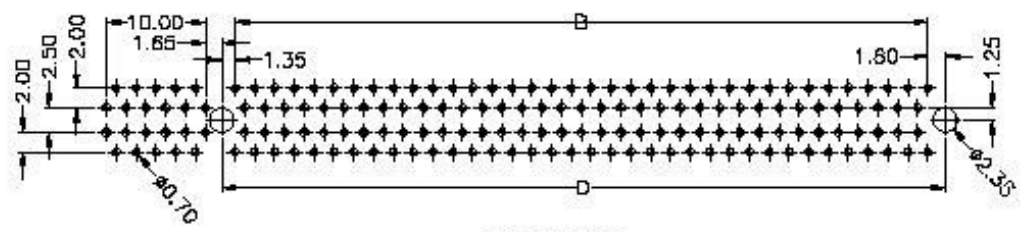

PCB LAYOUT

PCIX-DP-xxx-LF
 LEADFREE
 036-164WAY

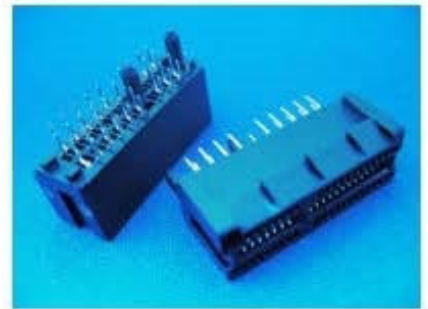

RoHS Compliant

All Connectors

Branch 1: Hefei Branch
 Branch 2: Shenzhen Branch
 Branch 3: Suzhou Branch
 Branch 4: Wuxi Branch
 Branch 5: Xiamen Branch
 Branch 6: Zhongshan Branch

PART NO. PCIX-DP-xxx		CHECKED BY CY	TOLERANCES ARE	DESCRIPTION:	AREA	REVISIONS	HK	DATE
DWG NO. PCIX-DP-xxx								
FILE NO.		PROJECTION						
UNIT / mm	SCALE 1:1							