

NOTES:

***Material**

Housing: Nylon46+30%G.F, UL 94V-0 Rated. Color: Black.
 Contact: Brass(C2680 H)
 Plating: Gold plating over Nickel on contact
 Area; Tin plating on solder tail.

***Mechanical**








Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;

***Electrical Specification**

Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.

***Environmental**

Operating Temperature : -55°C to +105°C

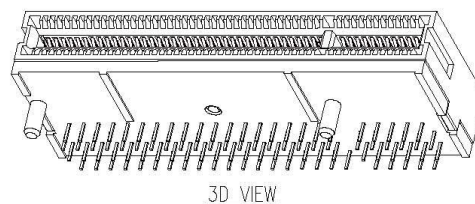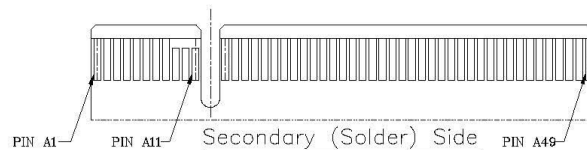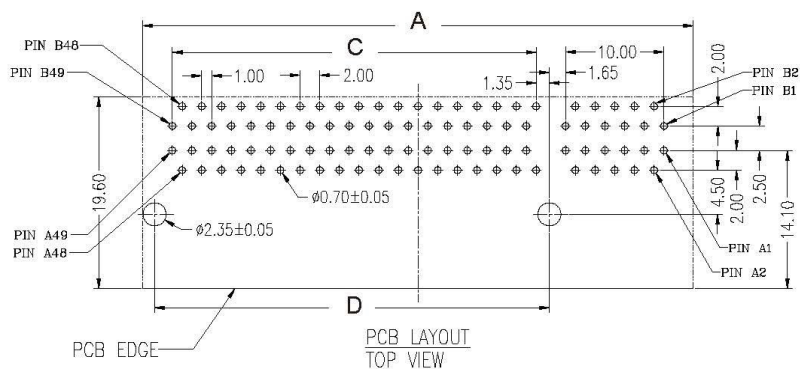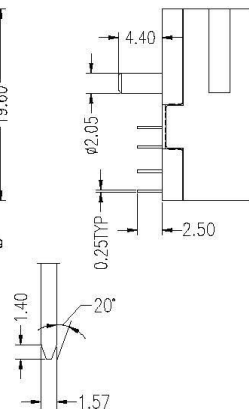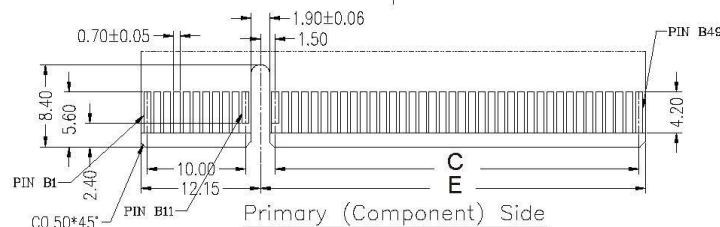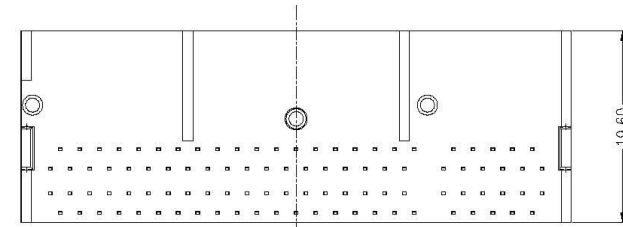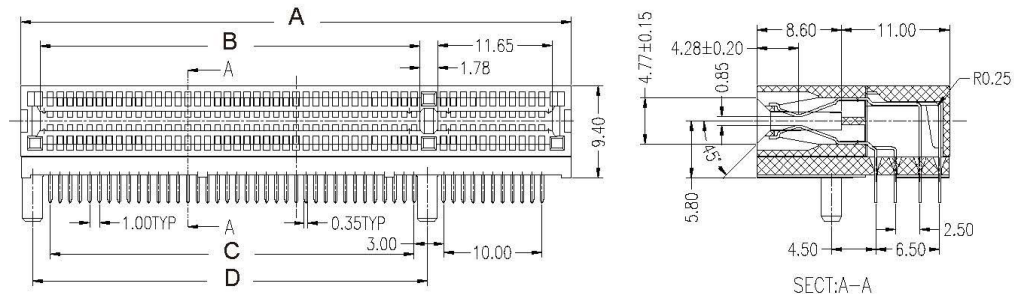

NO. of PIN	DIM A	DIM B	DIM C	DIM D	DIM E
280	147.0	129.65	128.0	131.15	130.15
164	89.0	71.65	70.0	73.15	72.15
98	56.0	38.65	37.0	40.15	39.15
64	39.0	21.65	20.0	23.15	22.15
36	25.0	7.65	6.0	9.15	8.15


All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenmerstr. 25


RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE
 X ±
 X ± 0.20
 XX ± 0.10
 XXX ±
 ANG ±



ORDER INFORMATION

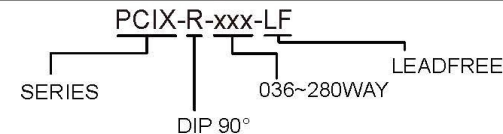

DESCRIPTION: PCI EXPRESS R/A DIP TYPE 98P CRT