




Specifications

Current Rating: 0.5Amp
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 250V AC
 Contact Resistance: 40mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP+30%GF Black
 All Material must be G.P Material

RECOMMENDED P.C.B.LAYOUT (Tolerance: ±0.05)

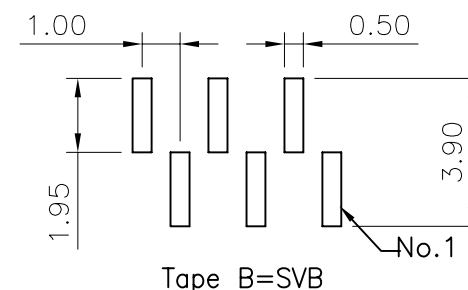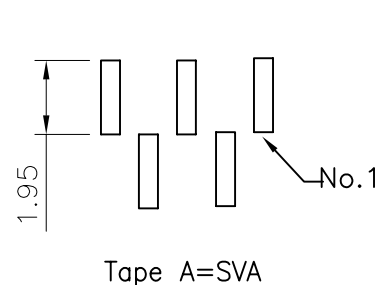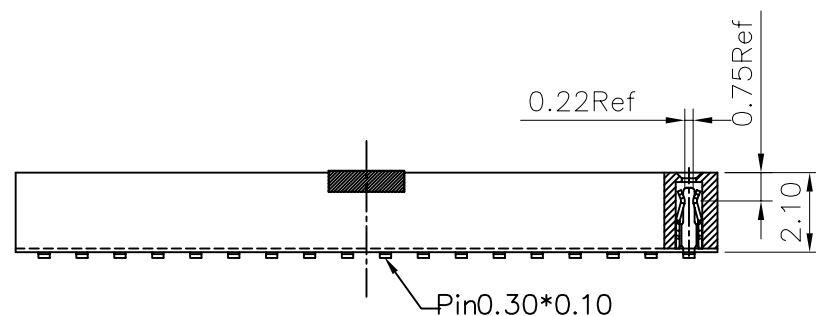

Ordering Information

HFGSVX1 - XX XX XXX L X

No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=W/2.9	Material L=LCP T=6T	Packing T=Tube TP=Tape+Reel
---------------------------------	---	-------------------------	---------------------------	-----------------------------------

GENERAL TOLERANCE X. ± .XX ±0.25 .XXX ±0.13	ANGLE TOLERANCE X°. ±5° .X° ±2° .XX° ±1° .XXX° ±0.5°	DESIGN DATE Andy2005.08.12	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		CHECK DATE		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	1.0mm Female Header SMT Type
A4	SHEET: 1 of 1		PART NO (料号)	HFGSVX1-XXXXXXL
			DRAWING NO.(图号)	HFGSVX1-01
				REV.AO