



Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 ▲LCP
 All materials must meet Greenconn requirement for environment protection

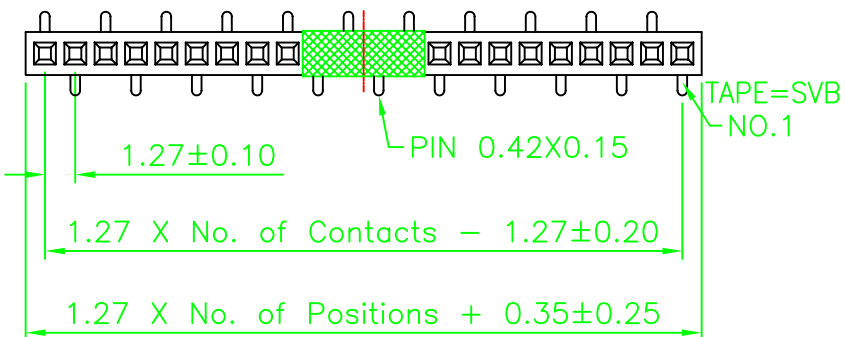


X	NOTE
3mm	02~03pins
5mm	04~26pins
10mm	26~40pins


RECOMMENDED P.C.B LAYOUT

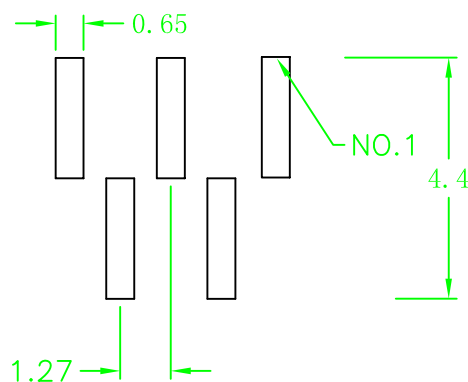

TYPE A=SVA

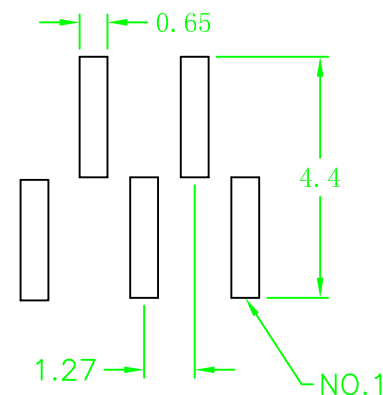

TYPE B=SVB

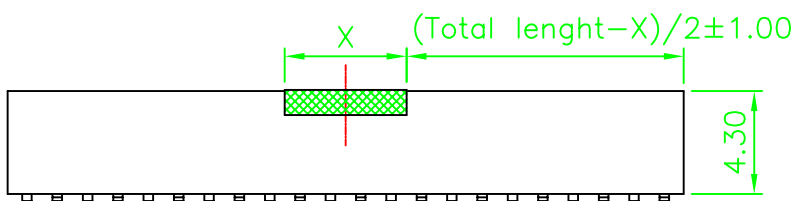

Ordering Information

HFISSVX1 - XX XX XXX L X

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=3.5, XXX=Select W
 Material: L=LCP, T=6T
 Packing: TR=Tape+Reel, T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ±0.38 .XX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	Andy2005.08.12	
UNIT:mm	SCALE 1:1	CHECK	DATE
A4	SHEET: 1 of 1	APPRO.	DATE

All Connectors www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	1.27MM Female Header SMT TYPE
PART NO (料号)	HFISSVX1-XXXXXXXXLBX
DRAWING NO.(图号)	HFISSVX1-05
	REV.A0