

| Dim. C | NOTE     |
|--------|----------|
| 4.00   | 03-25PIN |
| 10.15  | 26-50PIN |

### Specifications



Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -55°C to +125°C

### Materials


Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0

LCP

All materials must meet Greenconn requirement for environment protection

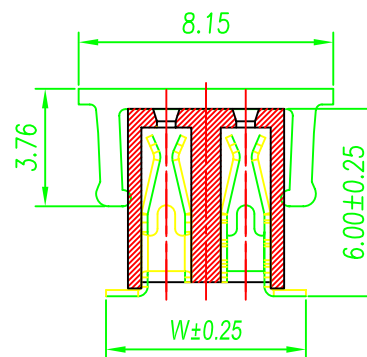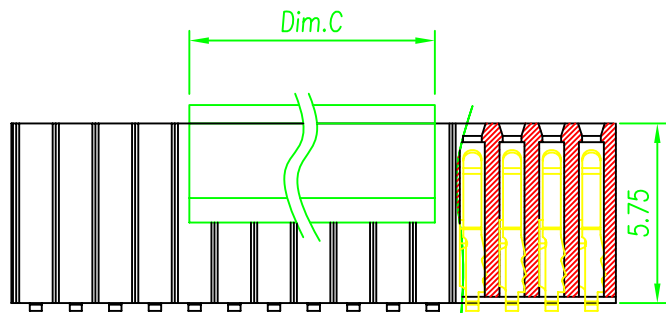

### Recommended P.C.Board Layout

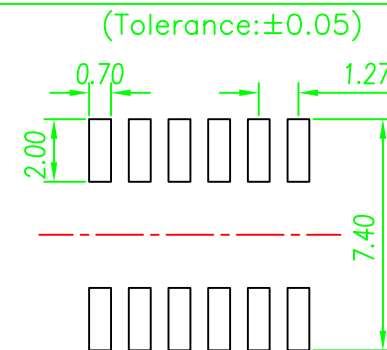

### Ordering Information

HFJDSV5U - XX XX XXX L P X

No. of Pins Per Row: 03-50  
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating  
 Pin Length: 001=6.4, XXX=Select W  
 Material: L=LCP, T=6T  
 Post: P=With Post, W=Without Post  
 Packing: TR=Tape+Reel, T=Tube

| GENERAL TOLERANCE                      | ANGLE TOLERANCE                                  | DESIGN DATE    | All Connectors   |                               |
|--|--|----------------|--|-------------------------------|
| X. ± 0.38<br>.XX ± 0.25<br>.XXX ± 0.13 | X' ± 5°<br>.X' ± 2°<br>.XX' ± 1°<br>.XXX' ± 0.5° | Andy2005.08.12 | www.allconnectors.eu   info@allconnectors.eu<br>Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25 |                               |
| UNIT:mm                                | SCALE 1:1  | APPRO. DATE    | FILE NAME (品名)   | 1.27MM Female Header SMT TYPE |
| A4                                     | SHEET: 1 of 1                                    |                | PART NO (料号)   | HFJDSV5U-XXXXXXXLPX           |
|  |  |                | DRAWING NO.(图号)  | HFJDSV5U-05 REV.A0            |