


- Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -55°C to +105°C
- Materials
 △ Contact Material: Phosphor Bronze
 Insulator Material: LCP UL94V-0, Color: Black.
- All materials must be GP materials

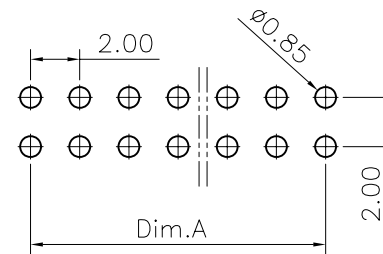

Recommended P.C.B. Layout
 Tolerance: 0.05mm

No. of PIN/ROW	Dimension Information	
	A	B
02	2.00	4.30
03	4.00	6.30
04	6.00	8.30
05	8.00	10.30
06	10.00	12.30
07	12.00	14.30
08	14.00	16.30
09	16.00	18.30
10	18.00	20.30
11	20.00	22.30
12	22.00	24.30
13	24.00	26.30
14	26.00	28.30
15	28.00	30.30
16	30.00	32.30
17	32.00	34.30
18	34.00	36.30
19	36.00	38.30
20	38.00	40.30
21	40.00	42.30
22	42.00	44.30
23	44.00	46.30
24	46.00	48.30
25	48.00	50.30
26	50.00	52.30
27	52.00	54.30
28	54.00	56.30
29	56.00	58.30
30	58.00	60.30
31	60.00	62.30
32	62.00	64.30
33	64.00	66.30
34	66.00	68.30
35	68.00	70.30
36	70.00	72.30
37	72.00	74.30
38	74.00	76.30
39	76.00	78.30
40	78.00	80.30

Ordering Information

HFLDR5G - XX XX XXX L

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001 = 2.4/7.25, XXX=Select A/R
 Material: L=LCP, T=NL6T

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	All Connectors	
X. ±	X°. ±5'	Andy2005.08.12		www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ±0.38	.X° ±2'	CHECK	DATE	FILE NAME (品名)	2.0MM Female Header R/A TYPE
.XX ±0.25	.XX° ±1'			PART NO (料号)	HFLDR5G-XXXXXXXXL
.XXX ±0.13	.XXX° ±0.5'	APPRO.	DATE	DRAWING NO.(图号)	HFLDR5-01
UNIT:mm	SCALE 1:1				REV.A0
A4	SHEET: 1 of 1				