


### Specifications

Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be GP materials

### Recommended P.C.Board Layout

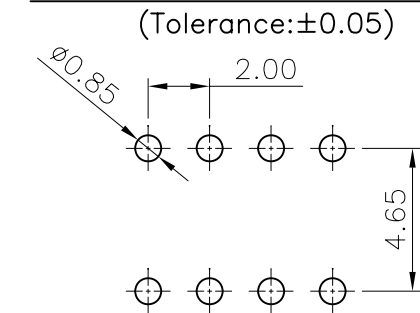

### Ordering Information

HFLDR6E	-	XX	XX	XXX	T
No. of Pins	Standard Plating	Pin Length	Material		
Per Row	01=Gold Flash	001 =2.4	L=LCP		
02-40	02=Gold 3U"	XXX=Select A	T=NL6T		
	11=Tin				
	XX=Select Plating				

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
X. ±	X' ±5°	Andy2005.08.12		
.X ±0.38	.X' ±2°	CHECK DATE	FILE NAME (品名)	2.0MM Female Header R/A TYPE
.XX ±0.25	.XX' ±1°	APPRO. DATE	PART NO (料号)	HFLDR6E-XXXXXXXT
.XXX ±0.13	.XXX' ±0.5°		DRAWING NO.(图号)	HFLDR6E-01
UNIT:mm	SCALE 1:1			REV.A0
A4	SHEET: 1 of 1			