

Specifications


Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon-6T
 All materials must be GP materials

Recommended P.C.Board

Hole Layout

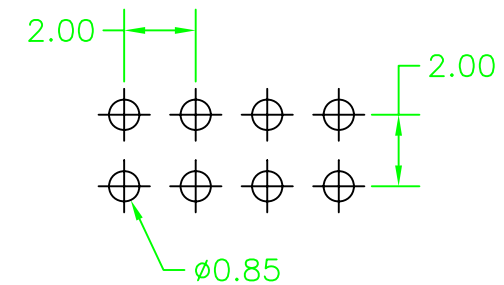

Ordering Information

HFLDS1 - XX XX XXX T

No. of Pins Standard Plating Pin Length Material
 Per Row 01=Gold Flash 001 =2.4 L=LCP
 02-40 02=Gold 3U" XXX=Select A T=NL6T
 11=Tin
 XX=Select Plating

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± .X .XX ±0.38 .XXX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.0MM Female Header DIP TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HFLDS1-XXXXXXXT
			DRAWING NO.(图号)	HFLDS1-01
				REV.A0