

Dim:A	NOTE
4mm	02~05pins
8.05mm	06~40pins

Specifications



Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

Recommended P.C.Board

Hole Layout
 (Tolerance: ±0.05)

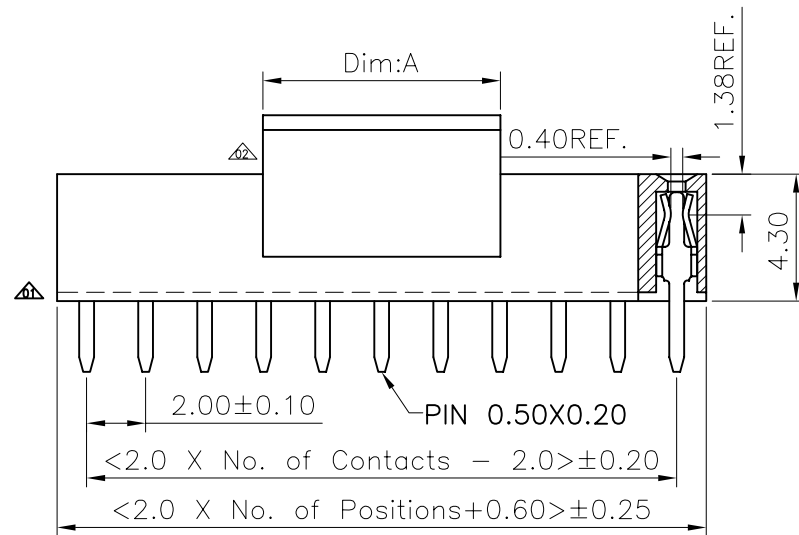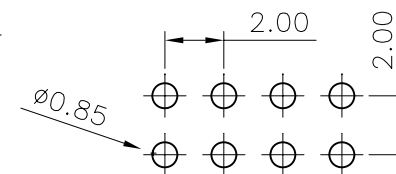

Ordering Information

Ordering Information

HFLDS3 - XX XX XXX T

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001 =2.4, XXX=Select A
 Material: L=LCP, T=NL6T

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	PART NO (料号)	HFLDS3-XXXXXXXT
A4	SHEET: 1 of 1			DRAWING NO.(图号)	HFLDS3-01
					REV.A0