


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

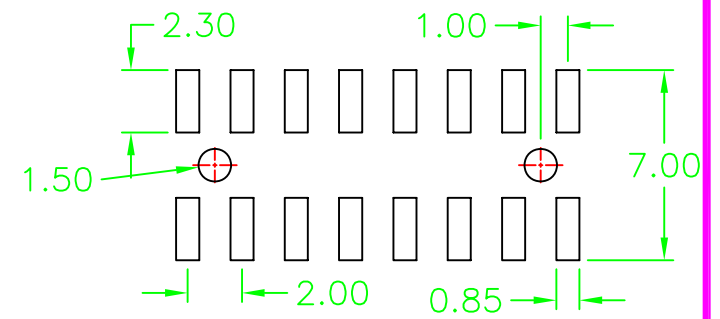

Ordering Information

HFLDSV1 - XX XX XXX T P X

No. of Pins Per Row	Standard Plating	Pin Length	Material	Post	Packing
02-50	01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	001=5.6 XXX=Select W	L=LCP T=NL6T	P=With Post W=Without Post	TR=Tape+Reel T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	FILE NAME (品名)	2.0MM Female Header SMT TYPE
A4	SHEET: 1 of 1			PART NO (料号)	HFLDSV1-XXXXXXTPX
				DRAWING NO.(图号)	HFLDSV1-05
					REV. AO