


X	NOTE
5mm	03~25PIN
10mm	26~35PIN




Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

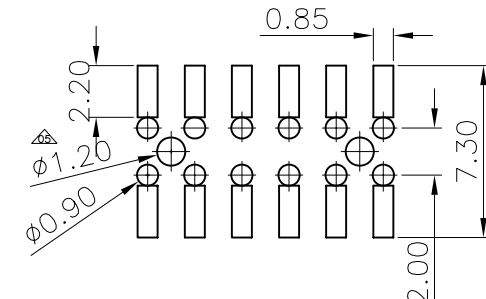

RECOMMENDED P.C.B LAYOUT

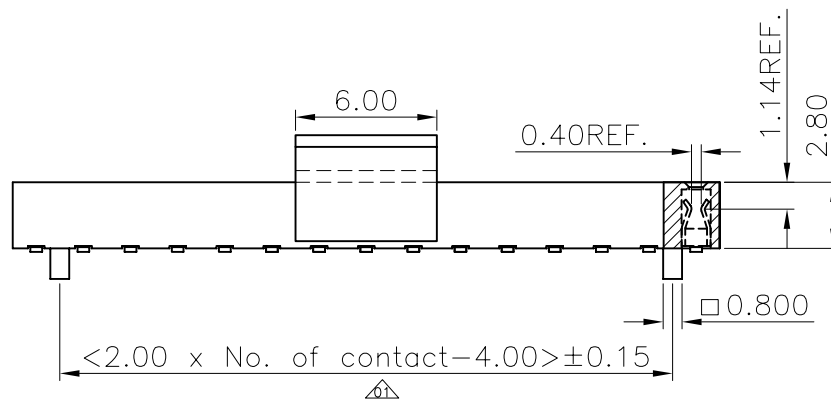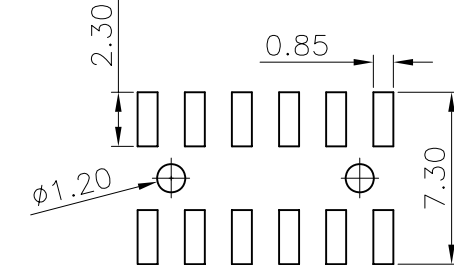

Ordering Information

HFLDSV8 - XX XX XXX T P X

No. of Pins Per Row 04-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Fin XX=Select Plating	Pin Length 001=6.5 XXX=Select W	Material L=LCP T=NL6T	Post P=With Post W=Without Post	Packing TR=Tape+Reel T=Tube
---------------------------------	---------------------------------------------------------------------------------	---------------------------------------	-----------------------------	---------------------------------------	-----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X° ± 5° .X° ± 2° .XX° ± 1° .XXX° ± 0.5°	Andy2005.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	PART NO (料号)	HFLDSV8-XXXXXXTPX
A4	SHEET: 1 of 1			DRAWING NO.(图号)	HFLDSV8-05
					REV.A0