


Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

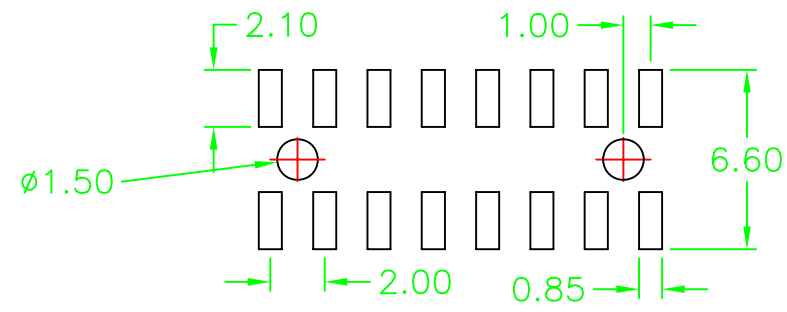

Ordering Information

HFLDSV3 - XX XX XXX T P X

No. of Pins Per Row 02-50	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=5.6 XXX=Select W	Material L=LCP T=NL6T	Post P=With Post W=Without Post	Packing TR=Tape+Reel T=Tube
------------------------------	---	---------------------------------------	-----------------------------	---------------------------------------	-----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	All Connectors www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	Andy2005.08.12			
UNIT:mm	SCALE 1:1	APPRO.	DATE	FILE NAME (品名)	2.0MM Female Header SMT TYPE
A4	SHEET: 1 of 1			PART NO (料号)	HFLDSV3-XXXXXXTPX
				DRAWING NO.(图号)	HFLDSV3-05
					REV.A0