


Specifications



Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon-6T
 All materials must meet Greenconn requirement for environment protection.

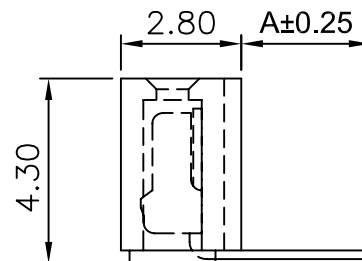

Recommended P.C.Board
 Hole Layout

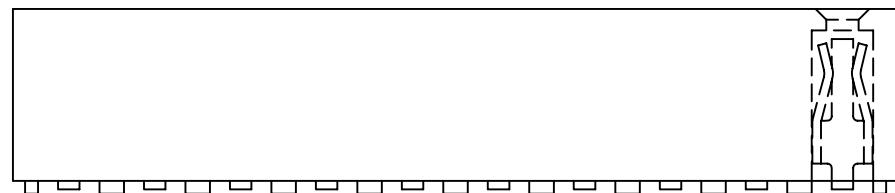

Ordering Information

HFLSR3 -	XX	XX	XXX	T
No. of Pins Per Row	Standard Plating	Pin Length	Material	
02-40	01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	001 =2.4 XXX=Select A	L=LCP T=NL6T	

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.0MM Female Header R/A TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HFLSR3-XXXXXXXT
			DRAWING NO.(图号)	HFLSR3-01
				REV.A0