

Specifications


Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must meet Greenconn requirement for environment protection

Recommended P.C.B. Layout

(Tolerance: 0.05mm)

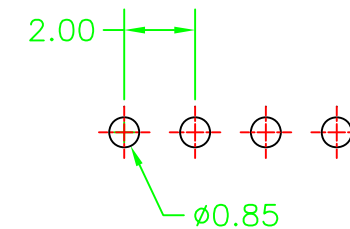

Ordering Information

HFLSS3	-	XX	XX	XXX	T
No. of Pins Per Row	Standard Plating	Pin Length	Material		
02-40	01=Gold Flash 02=Gold 3U" 1I=Tin XX=Select Plating	001 =2.4 XXX=Select A	L=LCP T=NL6T		

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12			
UNIT:mm	SCALE 1:1	CHECK	DATE	FILE NAME (品名)	2.0MM Female Header DIP TYPE
A4	SHEET: 1 of 1	APPRO.	DATE	PART NO (料号)	HFLSS3-XXXXXXXL
				DRAWING NO.(图号)	HFLSS3-01
				REV.	AO