


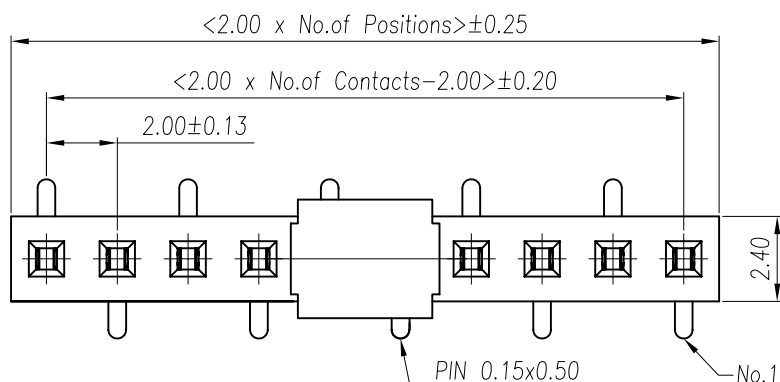


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T (Processing temp. 260°C, 10sec)
 All materials must be GP materials

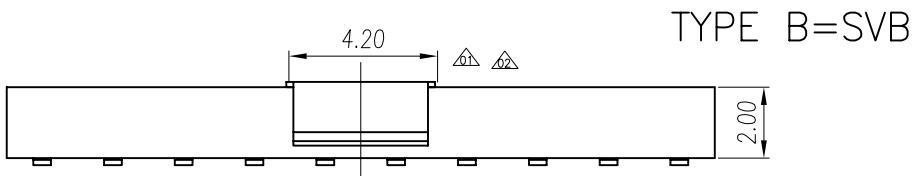

RECOMMENDED P.C.B LAYOUT

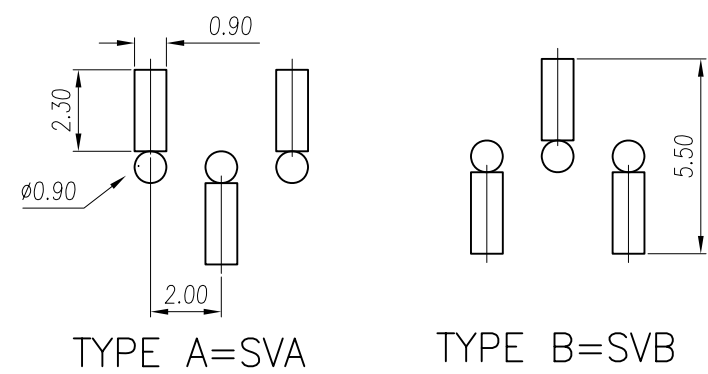

Ordering Information

HFLSSV2 - XX XX XXX T X

| | | | | |
|---------------------------------|---|---------------------------------------|-----------------------------|-----------------------------------|
| No. of Pins Per Row 02-40 | Standard Plating 01=Gold Flash 02=Gold 3U" 11=Fin XX=Select Plating | Pin Length 001=4.5 XXX=Select W | Material L=LCP T=NL6T | Packing TR=Tape+Reel T=Tube |
|---------------------------------|---|---------------------------------------|-----------------------------|-----------------------------------|

| | | | | |
|--|---|-------------------------------|--|------------------------------|
| GENERAL TOLERANCE X. ±0.38 .XX ±0.25 .XXX ±0.13 | ANGLE TOLERANCE X° ±5° .X° ±2° .XX° ±1° .XXX° ±0.5° | DESIGN DATE Andy2005.08.12 | www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25 | |
| | | CHECK DATE | | |
| UNIT:mm | SCALE 1:1 | APPRO. DATE | FILE NAME (品名) | 2.0MM Female Header SMT TYPE |
| A4 | SHEET: 1 of 1 | | PART NO (料号) | HFLSSV2-XXXXXXXXTX |
| | | | DRAWING NO.(图号) | HFLSSV2-05 |
| | | | | REV.A0 |