


2.54mm PITCH FEMALE HEADER, DOUBLE ROW, VERTICAL, STRAIGHT THROUGH HOLE, BODY HEIGHT=13.00mm, ROHS COMPLIANT

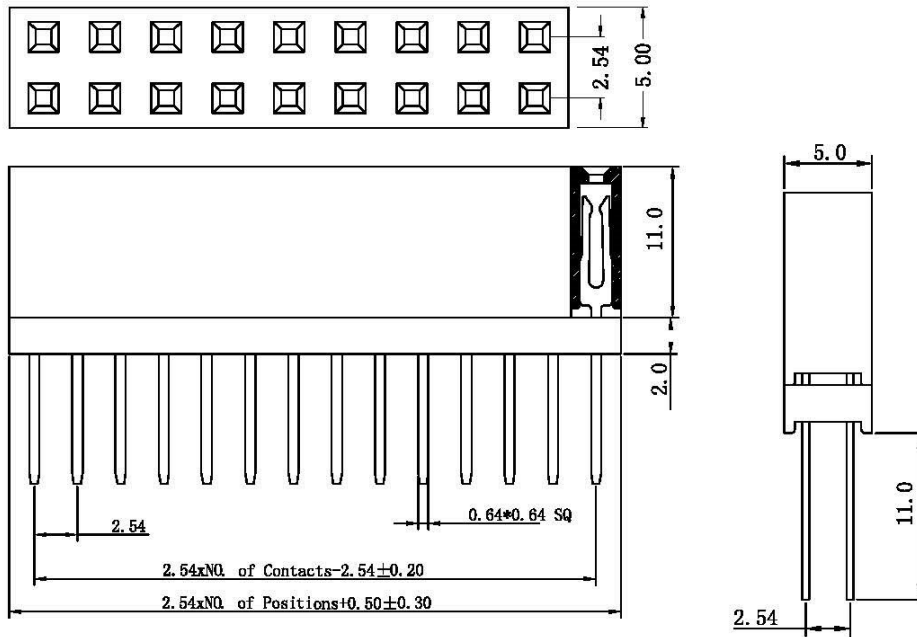

RECOMMENDED PCB LAYOUT

Material Information:

Terminal: Brass
 Insulator: PA6T+30%G.F, UL94V-0
 Plating: Au or Sn plated over 50 U" Ni
 All materials compliant with ROHS

Technical Specifications:

Current Rating: 3A
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000M Ωmin
 Dielectric Voltage: 500V AC/minute
 Operation Temperature: -45° C to +105° C

Ordering Information

AFSW13 - XX XX XX B1 B
 ① ② ③

- ① No. of Contacts Per Row: 02 To 40
- ② Plating Option:
 01: Gold Flash Over All
 3S: 30U" Gold On Contact & Tin On Tail
 FS: Gold Flash On Contact & Tin On Tail
 OS: Tin Plated Over All
- ③ Packing Option:
 B: PE Bag



www.allconnectors.de
 info@allconnectors.de
 Tel: 0049 711 7008938
 Fax: 0049 711 7008939
 70734 Filderstadt Germany
 R&D: mesch.25

绘图 (DRAWN)

孙高田

投影 (PROJECT)



公差 (TOLERANCE)

料号 (PART NO)

AFSW13-XXXXXXB1B

审核 (CHECKED)

刘思晴

单位 (UNIT)

MM

0.0 ±0.30

核准 (APPROVE)

比例 (SCALE)

1:1

0.00 ±0.20

品名 (NAME)

2.54双排母 方针 180度

版本 (EDITION)

A

日期 (DATE)

2013/12/14