


PIN 0.74X0.40

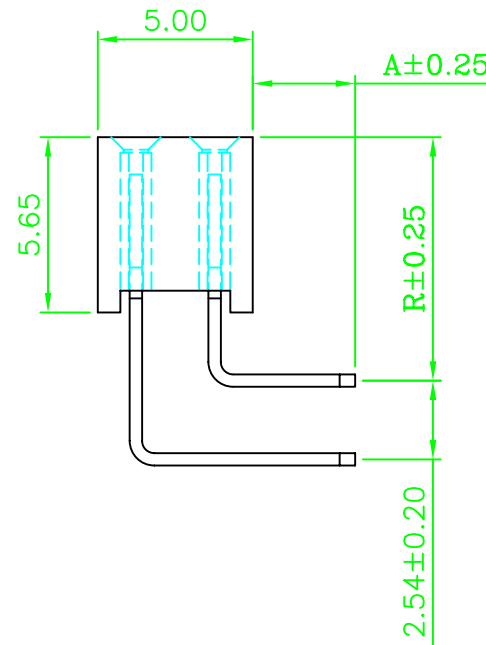


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 P.B.T
 All materials must be GP materials

Recommended P.C.Board Hole Layout

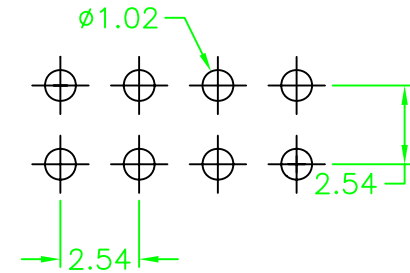

Ordering Information

HFNDR5 - XX XX XXX P

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001 =3.2/7.6, XXX=Select A/R
 Material: L=LCP, T=6T, P=PBT

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±0.38 .XX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.54MM Female Header R/A TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HFNDR5-XXXXXXXP
			DRAWING NO.(图号)	HFISR5-01
				REV.A0