


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be GP materials

Recommended P.C.Board Hole Layout

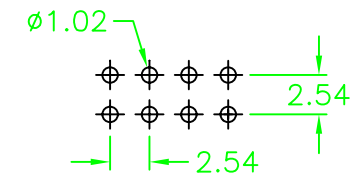

Ordering Information

HFNDR5G - XX XX XXX P

No. of Pins Per Row: 02-40

Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating

Pin Length: 001 =3.2/10.5, XXX=Select A/R

Material: L=LCP, T=NL6T, P=PBT

| | | | | |
|--|---|----------------|--|-------------------------------|
| GENERAL TOLERANCE | ANGLE TOLERANCE | DESIGN DATE | www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25 | |
| .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 | .X° ± 5° .X° ± 2° .XX° ± 1° .XXX° ± 0.5° | Andy2005.08.12 | | |
| UNIT:mm | SCALE 1:1 | CHECK DATE | FILE NAME (品名) | 2.54MM Female Header R/A TYPE |
| A4 | SHEET: 1 of 1 | APPRO. DATE | PART NO (料号) | HFNDR5G-XXXXXXXXP |
| | | | DRAWING NO.(图号) | HFNDR5G-01 |
| | | | REV. | AO |