

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

P.B.T

All materials must be GP materials

Recommended P.C.Board Hole Layout

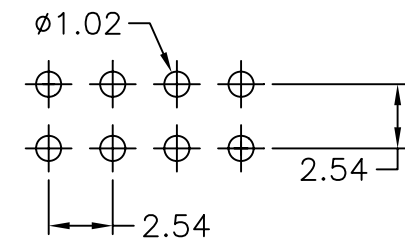

Ordering Information

HFNDR5Y - XX XX XXX P

No. of Pins Per Row: XX
 Standard Plating: XX
 Pin Length: XXX
 Material: P

01=Gold Flash
 02=Gold 3U
 XX=Select Plating
 001 =3.2/10.5
 XXX=Select A/R
 L=LCP
 T=NL6T
 P=PBT

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN DATE	
X.	±	X.	±5°	Andy2005. 08. 12	
.X	±0.38	.X	±2°	CHECK	DATE
.XX	±0.25	.XX	±1°		
.XXX	±0.13	.XXX	±0.5°	APPRO.	DATE
UNIT:mm	SCALE	1:1			
A4	SHEET: 1 of 1				

All Connectors	
www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	2.54MM Female Header R/A TYPE
PART NO (料号)	HFNDR5Y-XXXXXXXXP
DRAWING NO.(图号)	HFIDR5Y-01
	REV.A0