


NO 1

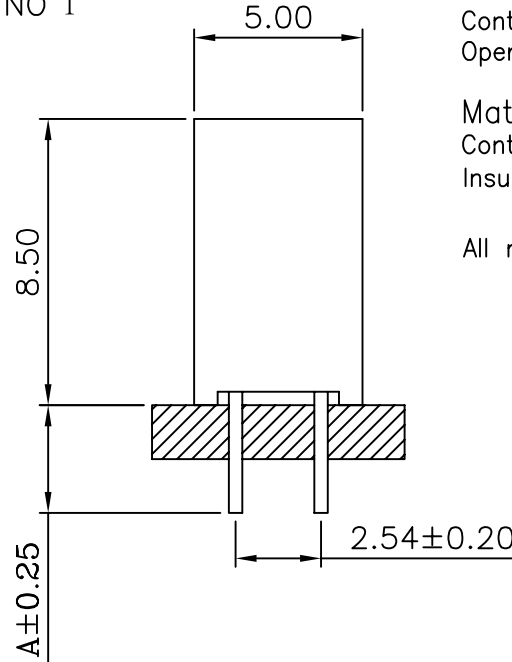


**Specifications**

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 P.B.T  
 All materials must be GP materials

**Recommended P.C.Board Hole Layout**

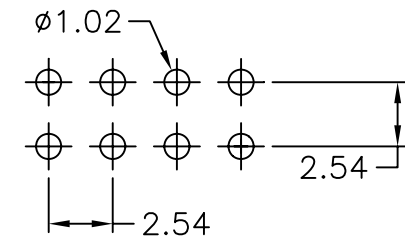

**Ordering Information**

HFNDS5Y - XX XX 001 P

No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U XX=Select Plating	Pin Length 001 =3.2 XXX=Select A	Material L=LCP T=NL6T P=PBT
---------------------------------	--	--	--------------------------------------

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE	 <small>www.allconnectors.eu   info@allconnectors.eu          Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25</small>	
X.	±	X°	±5°	Andy2005. 08. 12			
.X	±0.38	.X°	±2°	CHECK	DATE	FILE NAME (品名)	
.XX	±0.25	.XX°	±1°			2.54MM Female Header DIP TYPE	
.XXX	±0.13	.XXX°	±0.5°	APPRO.	DATE	PART NO (料号)	
UNIT:mm		SCALE	1:1			HFNDS5Y-XXXX001P	
A4		SHEET:	1 of 1			DRAWING NO.(图号)	
						HFIDS5Y-01	REV.A0