


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 P.B.T
 All materials must meet Greenconn requirement for environment protection Δ

Recommended P.C.B. Layout
 (Tolerance:0.05mm)

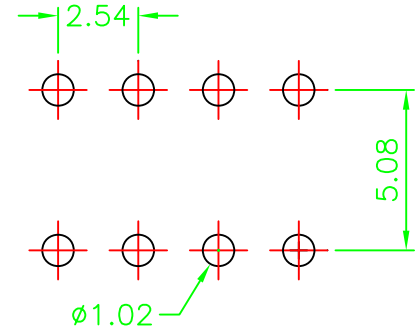

Ordering Information

HFNDS72 - XX XX XXX L X

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=3.0/5.08, XXX=Select A/W
 Material: L=LCP, T=NL6T
 Packing: TR=Tape+Reel1, T=Tube

GENERAL TOLERANCE .X ±0.38 .XX ±0.25 .XXX ±0.13	ANGLE TOLERANCE .X° ±5° .XX° ±2° .XXX° ±1° .XXX° ±0.5°	DESIGN DATE Andy2005.08.12	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		CHECK DATE		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
A4	SHEET: 1 of 1		PART NO (料号)	HFNDS72-XXXXXXXXLBX
			DRAWING NO.(图号)	HFNDS72-05
			REV.	AO