


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 PBT
 All materials must be GP materials

Recommended P.C.Board Hole Layout

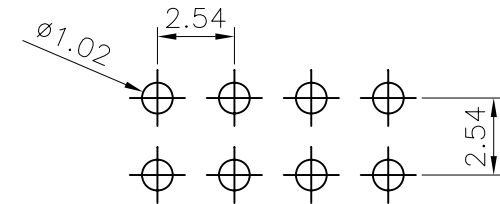

Ordering Information

HFNDS8 - XX XX XXX P

No. of Pins Per Row	Standard Plating	Pin Length	Material
02-40	01=Gold Flash 02=Gold 3U" 11=Fin XX=Select Plating	001 =3.5 XXX=Select A	L=LCP T=NL6T P=PBT

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
X. ±	X° ±5°	Andy2005.08.12		
.X ±0.38	.X° ±2°	CHECK	DATE	FILE NAME (品名)
.XX ±0.25	.XX° ±1°			2.54MM Female Header DIP TYPE
.XXX ±0.13	.XXX° ±0.5°	APPRO.	DATE	PART NO (料号)
				HFNDS8-XXXXXXXXP
UNIT:mm	SCALE	1:1		DRAWING NO.(图号)
A4	SHEET: 1 of 1			HFIDS8-01
				REV.AO