
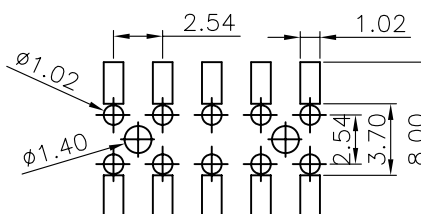
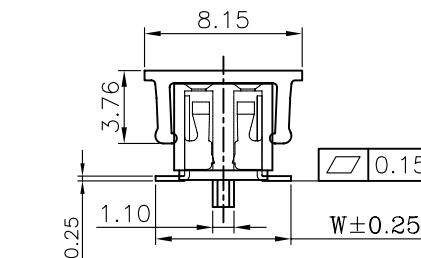



- Specifications
 - Current Rating: 3Amp
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding: 600V AC/DC
 - Contact Resistance: 20mΩ Max.
 - Operating Temperature: -40°C to +105°C

- Materials
 - Contact Material: Phosphor Bronze
 - Insulation Material: Polyester, UL 94V-0
 - B= Nylon 6T Black
 - C= LCP Black
 - All materials must be GP materials

Name	Dim.X	NOTE
acetate tape	5.00mm	02~25pins
	10.00mm	26~40pins
CAP	4.00mm	02~08pins
	10.15mm	09~40pins

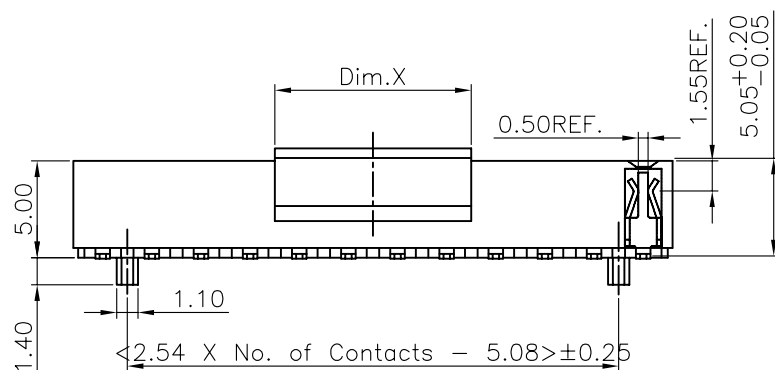

RECOMMENDED P.C.B LAYOUT FOR BOTTOM ENTRY
(Tolerance:±0.05)

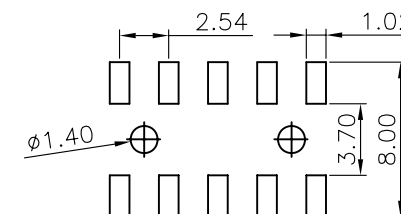

RECOMMENDED P.C.B LAYOUT FOR TOP ENTRY
(Tolerance:±0.05)

HFNDSV2 - XX XX XXX T P X

No. of Pins Per Row	Standard Plating	Pin Length	Material	Post	Packing
02-50	01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	001=7.0 XXX=Select W	L=LCP T=NL6T	P=With Post W=Without Post	TR=Tape+Reel T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	Allconnectors	
X. ±	X' ±5°	Andy2005.08.12		www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ±0.38	.X' ±2°	CHECK	DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
.XX ±0.25	.XX' ±1°	APPRO.	DATE	PART NO (料号)	HFNDSV2-XXXXXXXTBX
.XXX ±0.13	.XXX' ±0.5°			DRAWING NO.(图号)	HFNDSV2-05
UNIT:mm	SCALE 1:1				REV.A0
A4	SHEET: 1 of 1				