

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze


Insulation Material: Polyester, UL 94V-0

Nylon6T

All materials must be GP materials

Recommended P.C.B. Layout

(Tolerance: 0.05mm)

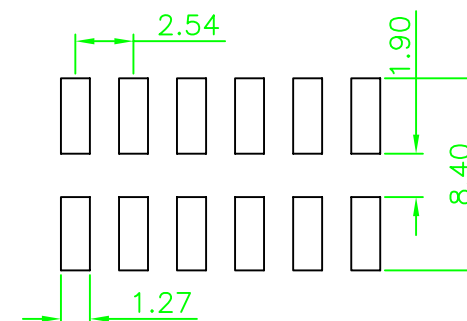

HFND5V5 - XX XX XXX T P X

No. of Pins Per Row 02-50
Standard Plating 01=Gold Flash 02=Gold 3U" 11=Fin XX=Select Plating
Pin Length 001=8.5 XXX=Select W
Material L=LCP T=NL6T
Post P=With Post W=Without Post
Packing TR=Tape+Reel T=Tube

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE
X. ±0.38		X. ±5°		Andy2005.08.12	
.XX ±0.25		.XX ±2°		CHECK	DATE
.XXX ±0.13		.XXX ±1°			
.XXX ±0.5°		.XXX ±0.5°		APPRO.	DATE
UNIT:mm		SCALE 1:1			
A4		SHEET: 1 of 1			

All Connectors	
www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	2.54MM Female Header SMT TYPE
PART NO (料号)	HFND5V5-XXXXXXXTBX
DRAWING NO.(图号)	HFND5V5-05
REV.	A0