


1. Specifications:

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000MΩ Min.
- 1.3 Dielectric Withstanding: 600V AC/DC
- 1.4 Contact Resistance: 20mΩ Max.
- 1.5 Operating Temperature: -40°C to +105°C

2. Materials:

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
 - A=02~24pins use P.B.T Black ;
 - 25~40pins use Nylon6T Black
 - B=02~40pins use Nylon6T Black
- 2.3 All materials must be GP materials

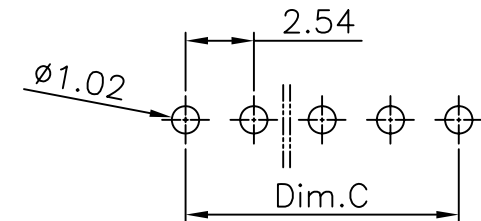

Recommended P.C.B. Layout
(Tolerance:0.05mm)

Ordering Information

HFNSSH	-	XX	XX	XXX	P
No. of Pins	Standard Plating	Pin Length	Material		
Per Row	01=Gold Flash	001 =20/3.4	L=LCP		
02-40	02=Gold 3U"	XXX=Select A/B	T=NL6T		
	11=Tin		P=PBT		
	XX=Select Plating				

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38	X° ± 5'	Andy2005.08.12		
.X ± 0.25	.X° ± 2'	CHECK DATE	FILE NAME (品名)	2.54MM Female Header DIP TYPE
.XXX ± 0.13	.XX° ± 1'	APPRO. DATE	PART NO (料号)	HFNSSH-XXXXXXXXP
UNIT:mm	SCALE 1:1		DRAWING NO.(图号)	HFISSH-01
A4	SHEET: 1 of 1			REV.A0