


### Specifications

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T(Processing temp.260°,10sec)  
 All materials must be GP materials

### Recommended P.C.Board Hole Layout (Tolerance: ±0.05)

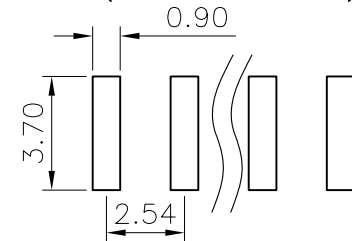

### Ordering Information

HFLSSH5 - XX XX XXX T X

No. of Pins Per Row	Standard Plating	Pin Length	Material	Packing
02-40	01=Gold Flash 02=Gold 3U" 11=Pin XX=Select Plating	001=5.0 XXX=Select W	L=LCP T=NL6T	TR=Tape+Reel T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
X. ±0.38 .XX ±0.25 .XXX ±0.13	X° ±5° .X° ±2° .XX° ±1° .XXX° ±0.5°	Andy2005.08.12			
UNIT:mm	SCALE 1:1	CHECK	DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
A4	SHEET: 1 of 1	APPRO.	DATE	PART NO (料号)	HFLSSH5-XXXXXXXTBX
				DRAWING NO.(图号)	HFLSSH5-05
					REV.A0