


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials


Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

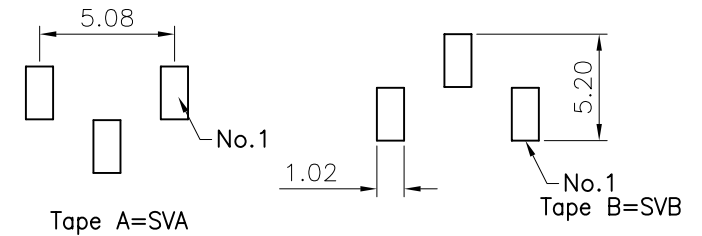

Ordering Information

HFLSSVX4 - XX XX XXX T X

No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Pin XX=Select Plating	Pin Length 001=4.2 XXX=Select W	Material L=LCP T=NL6T	Packing TR=Tape+Re11 T=Tube
---------------------------------	---	---------------------------------------	-----------------------------	-----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		Andy2005.08.12			
X. ±	X°. ±5'	CHECK	DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
.X ±0.38	.X' ±2'			PART NO (料号)	HFLSSVX4-XXXXXXXTBX
.XX ±0.25	.XX' ±1'	APPRO.	DATE	DRAWING NO.(图号)	HFLSSVX4-05
.XXX ±0.13	.XXX' ±0.5'				REV.A0
UNIT:mm	SCALE 1:1				
A4	SHEET: 1 of 1				