


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

Recommended P.C.Board Layout

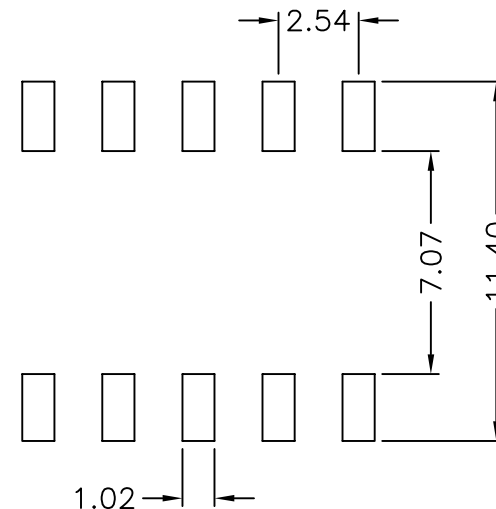

Ordering Information

HFNSSV6 - XX XX XXX L X

No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Fin XX=Select Plating	Pin Length 001=10.5 XXX=Select W	Material L=LCP T=NL6T	Packing TR=Tape+Reel T=Tube
---------------------------------	---	--	-----------------------------	-----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±	X' ±5°	Andy2005.08.12		
.X ±0.38	.X' ±2°	CHECK DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
.XX ±0.25	.XX' ±1°	APPRO. DATE	PART NO (料号)	HFNSSV6-XXXXXXLBX
.XXX ±0.13	.XXX' ±0.5°		DRAWING NO.(图号)	HFNSSV6-05
UNIT:mm	SCALE 1:1			REV.A0
A4	SHEET: 1 of 1			