

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T


All materials must meet Greenconn requirement for environment protection

Recommended P.C.Board

Top Entry Layout

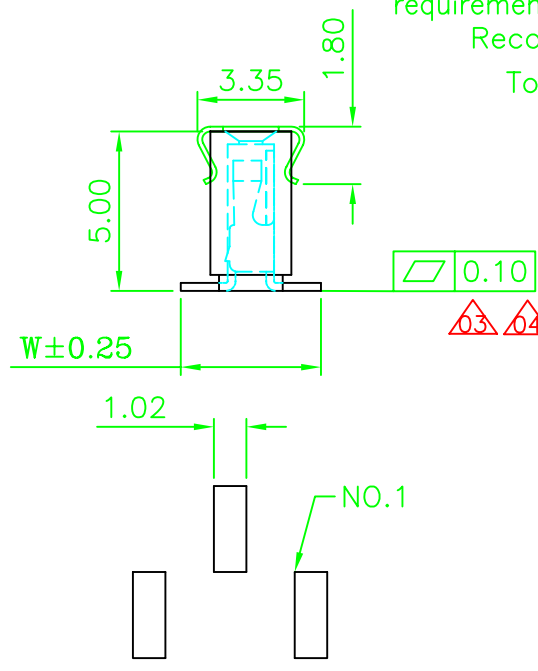

TAPE B=SVB



TAPE A=SVA

Ordering Information

HFLSSVX2 - $\left[\begin{array}{c} \text{XX} \\ \text{XX} \\ \text{XXX} \\ \text{L} \\ \text{X} \end{array} \right]$

No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=4.4 XXX=Select W	Material L=LCP T=NL6T	Packing TR=Tape+Reel T=Tube
---------------------------------	---	---------------------------------------	-----------------------------	-----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	All Connectors www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HFLSSVX2-XXXXXXXLBX
			DRAWING NO.(图号)	HFLSSVX2-05
			REV.	AO