


Recommended P.C.Board Hole Layout

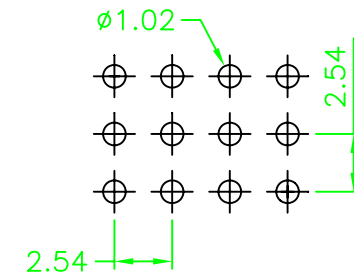

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

Ordering Information

HFNTR5 - XX XX XXX P

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001 =3.0, XXX=Select A
 Material: L=LCP, T=6T, P=PBT

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE	 <small>www.allconnectors.eu info@allconnectors.eu</small> <small>Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
X.	±	X°	±5°	Andy2005.08.12			
.X	±0.38	.X°	±2°	CHECK	DATE	FILE NAME (品名)	2.54MM Female Header DIP TYPE
.XX	±0.25	.XX°	±1°			PART NO (料号)	HFNTR5-XXXXXXXXP
.XXX	±0.13	.XXX°	±0.5°	APPRO.	DATE	DRAWING NO.(图号)	HFNTR5-01
UNIT:mm		SCALE	1:1				
A4		SHEET: 1 of 1					
							REV.A0