


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be GP materials

Recommended P.C.Board Hole Layout

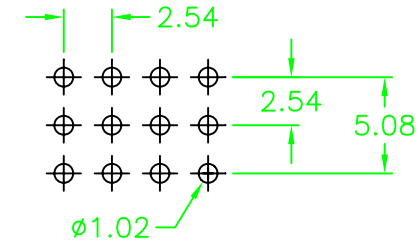

Ordering Information

HFNTS5 - XX XX XXX P

No. of Pins Per Row: XX (01-40)
 Standard Plating: XX (01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating)
 Pin Length: XXX (001=3.0, XXX=Select A)
 Material: P (L=LCP, T=NL6T, P=PBT)

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25		
X.	± 0.38	X'	±5°	Andy2005.08.12				
.X	±0.25	.X'	±2°	CHECK	DATE	FILE NAME (品名)	2.54MM Female Header DIP TYPE	
.XX	±0.13	.XX'	±1°	APPRO.		DATE	PART NO (料号)	HFNTS5-XXXXXXXP
.XXX	±0.13	.XXX'	±0.5°	UNIT:mm	SCALE	1:1	DRAWING NO.(图号)	HFNTS5-01
A4		SHEET: 1 of 1				REV.A0		