

Specifications

Current Rating: 7.9Amp
 Insulation Resistance: 5000M Ω Min.
 Dielectric Withstanding: 1500V AC/DC
 Contact Resistance: 30m Ω Max.
 Operating Temperature: -55°C to +105°C


MATERIAL:

-HOUSING: LCP. FLAMMABILITY UL94-V0
 OR OTHER HIGH LEVEL PLASTIC, COLOR:BLACK.
 -CONTACT:Phosphor Bronze

PLATING:

50u" Nickel UNDER PLATING ALL OVER,
 100u" Matte Tin PLATING(FREE LEAD),
 All materials must be GP materials

Recommended P.C.Board Layout

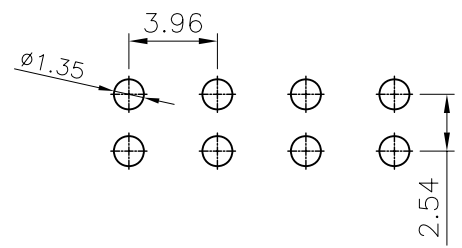

Ordering Information

HFPSS1 - XX XX XXX L

No. of Pins Per Row: 02-24
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001 =3.0, XXX=Select A
 Material: L=LCP, T=NL6T

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		Andy2005.08.12			
X. ±	X°. ±5'	CHECK	DATE	FILE NAME (品名)	3.96MM Female Header DIP TYPE
.X ±0.38	.X° ±2'			PART NO (料号)	HFPSS1-XXXXXXXL
.XX ±0.25	.XX° ±1'	APPRO.	DATE	DRAWING NO.(图号)	HFPSS1-01
.XXX ±0.13	.XXX° ±0.5'				REV.A0
UNIT:mm	SCALE 1:1				
A4	SHEET: 1 of 1				