

Specifications

Current Rating: 7.9Amp
 Insulation Resistance: 5000M Ω Min.
 Dielectric Withstanding: 1500V AC/DC
 Contact Resistance: 20mΩ Max. \triangle
 Operating Temperature: -55°C to +125°C \triangle

MATERIAL:

-HOUSING: LCP. FLAMMABILITY UL94-V0

-CONTACT: Phosphor Bronze



PLATING:

OR OTHER HIGH LEVEL PLASTIC, COLOR: BLACK.

50u" Nickel UNDER PLATING ALL OVER,


100u" Matte Tin PLATING(FREE LEAD),

All materials must be GP materials

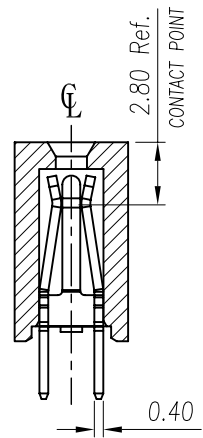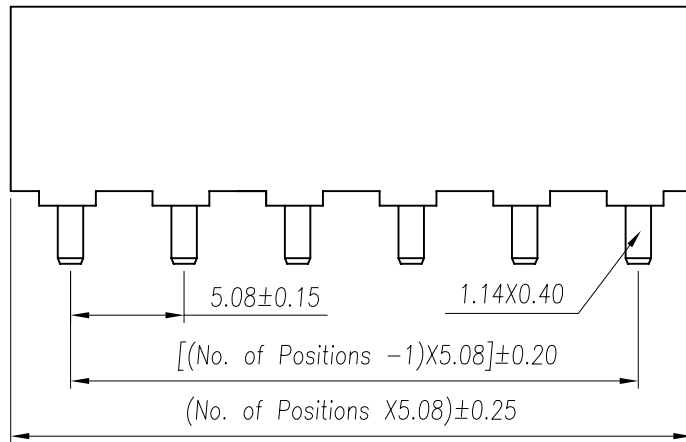

Recommended P.C.Board Layout

(Tolerance: ±0.05)

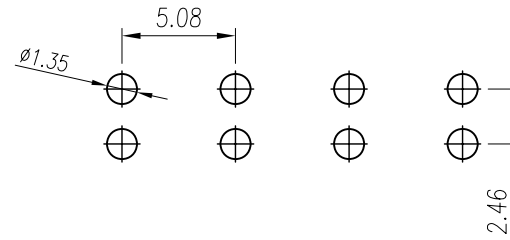

Ordering Information

HFRSS1 - XX XX XXX L

No. of Pins Per Row 02-24	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001 =2.6 XXX=Select A	Material L=LCP T=NL6T
---------------------------------	---	--	-----------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		Andy2005.08.12			
X. ±	X°. ±5'	CHECK	DATE	FILE NAME (品名)	5.08MM Female Header DIP TYPE
.X ±0.38	.X' ±2'			PART NO (料号)	HFRSS1-XXXXXXXL
.XX ±0.25	.XX' ±1'	APPRO.	DATE	DRAWING NO.(图号)	HFRSS1-01
.XXX ±0.13	.XXX' ±0.5'				REV.A0
UNIT:mm	SCALE 1:1				
A4	SHEET: 1 of 1				