B15 FEMALE HEADER (1.27mm * 2.54mm)
PROFILE : 4.6mm STRAIGHT (BOTTOM CLOSE TYPE)

PITCH: 1.27mm

SPECIFICATIONS

Material

Insulator : Nylon 6T, glass reinforced, rated UL 94V-0
Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 1000 MΩ min.
Dielectric Withstanding Voltage : 250V AC for 1minute
Operating Temperature : -40℃ to +105℃
♦Mating Suggestion : C09, C10, C13 & C14 series.

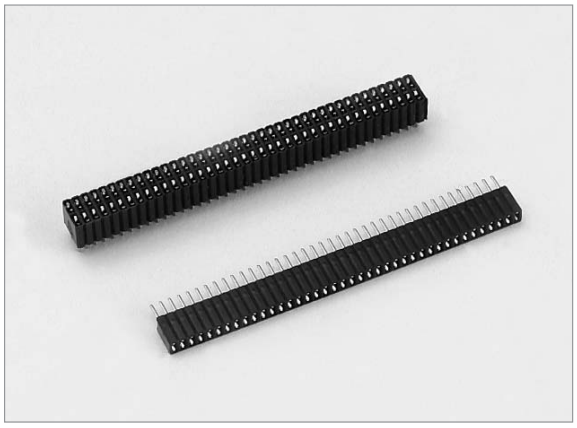

B

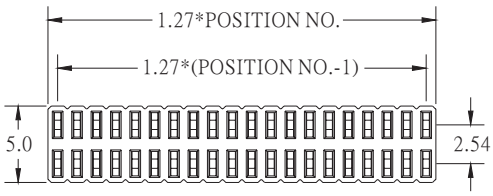

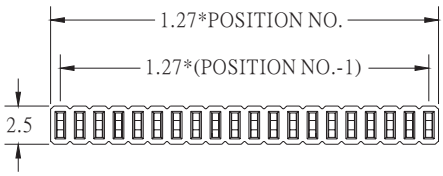

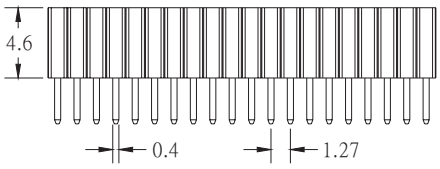

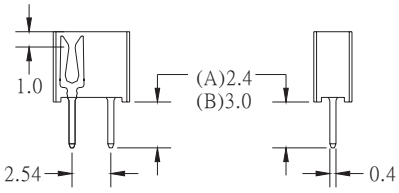

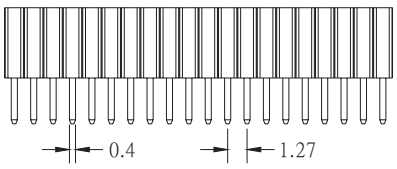



RECOMMENDED P.C.B LAYOUT



RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

B15 - [1] - [2] - [3] - [4] - [5] - G (RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.PIN LENGTH	5.INSULATOR COLOR
SINGLE ROW 1*2 - 1*50 DUAL ROW 2*2 - 2*50	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: 2.4mm B: 3.0mm	1. BLACK