

RoHS compliant





# SPECIFICATION

Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Black Liquid Crystal Polymer

Ordering Code:

CFD04- X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contact  
03 TO 40
- ③ Contact Plating  
A: Gold Flash  
E: 3u" Gold  
B: 10u" Gold  
C: 15u" Gold  
D: 30u" Gold  
T: Tin Plated
- ④ Special Function  
Profile :3.4mm  
Profile :4.3mm
- ⑤ Pin Length  
A1: 1.5mm  
A2: 2.4mm
- ⑥ Code Packing  
A: Tube  
B: Tray

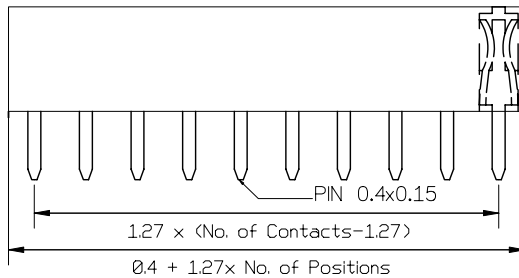

Recommended P.C.Board Hole Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu   info@allconnectors.eu Tel: +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 1.27mm Female Header, Straight Type Single Row ,Profile:3.4mm & 4.3mm DRAWN NO: CFD03-XXX-1 PRODUCT NO. CFD03-XXX
DRAWN		
CHECKED		
APPROVED		
REV	DESCRIPTION	DATE