

CFS05 1.27mm FEMALE HEADER, SMT TYPE

Profile: 3.7mm






Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 2000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40 ° C to +105° C
 Max Processing Temp: 230 ° C for 30 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 © Standard : NYLON-9T

RoHS compliant

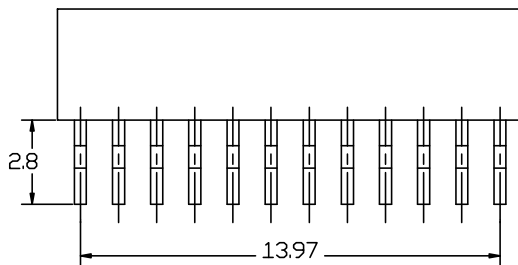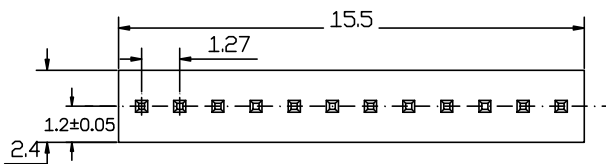

HOW TO ORDER

CFS05 - [X] - [X] - [X]

