


RoHS compliant



SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: Black Liquid Crystal Polymer







Processing

Max Processing Temp: 260 ° C for 6 seconds
 SMT Lead Coplanarity: (0.10mm)004"max (04-40)

Ordering Code:

CFS08- X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- | | |
|--|--|
| ① Series No: | ⑤ Contact Plating |
| ② No. of Contact
04 TO 40 | A: Gold Flash
B: 10u" Gold
C: 15u" Gold
D: 30u" Gold
E: 3u" Gold |
| ③ Contact Type
B1: Type B1
B2: Type B2 | ⑥ Code Packing
A: Tube
B: Pad+Tube
C: Pad+T&R |
| ④ Special Function
A: Profile:2.2mm
B: Profile:3.6mm
C: Profile:4.5mm | |

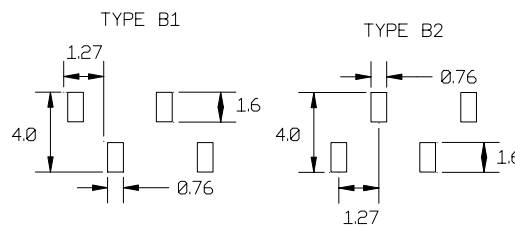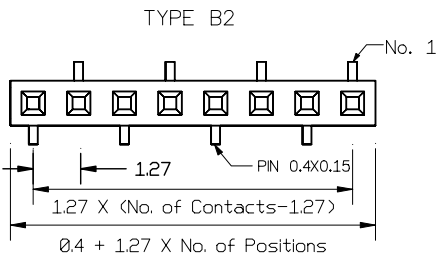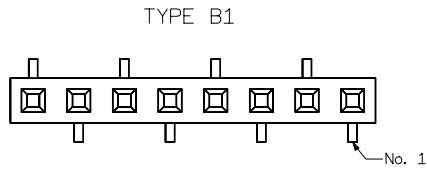

Recommended P.C.Board
SMD Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	All connectors <small>www.allconnectors.eu info@allconnectors.eu Tel: +49 (0)711 / 358 110 20 Fax: +49 (0)711 / 358 110 25</small>	
	SCALE: AS SHOWN	UNIT: mm
DRAWN	TITLE: 127mm Female Header, SMT Type Single Row, Profile: 2.0mm , 3.6mm , 4.5mm	
CHECKED	DRAWN NO: CFS08-XXXXX-1	
APPROVED	PRODUCT NO. CFS08-XXXXX	

REV	DESCRIPTION	DATE
-----	-------------	------