

RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: Black Liquid Crystal Polymer

Ordering Code:

DFD03- X - X - X - X
 ① ② ③ ④ ⑤

① Series No:

② No. of Contact
 06 TO 50





③ Contact Plating
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
 D: 30u" Gold
 T: Tin Plated
 H: Goldflash/Tin

④ Pin Length


A2: A=12.22mm / B=2.28mm
 A3: A=7.85mm / B=2.28mm

⑤ Code Packing

B: Tray

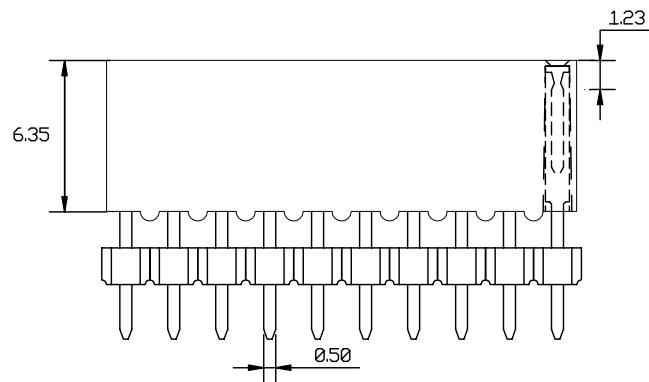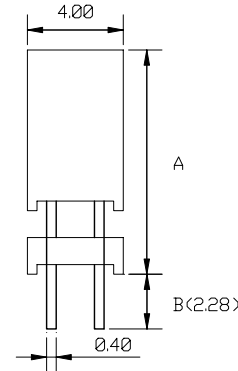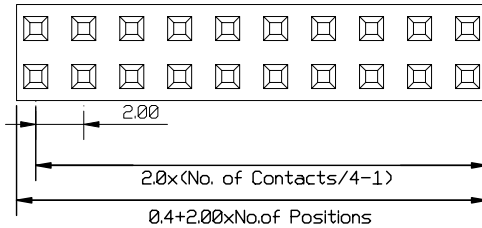

Recommended P.C.Board
 Hole Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel: +49 (0)711 / 358 110 20 Fax: +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN		TITLE: 2.0mm Elevated Socket Profile: 6.35mm
CHECKED		
APPROVED		DRAWN NO: DFD03-XXXX-1
REV		PRODUCT NO. DFD03-XXXX
DESCRIPTION		
DATE		