
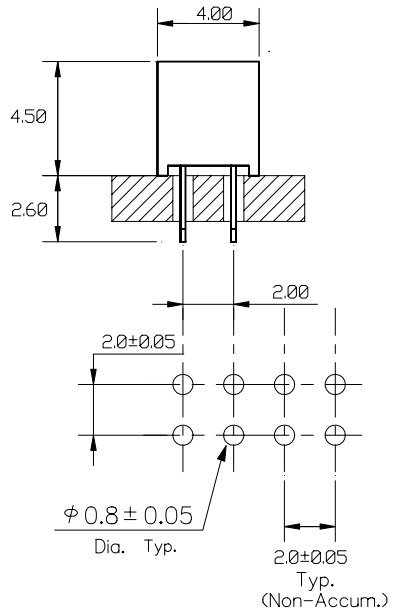
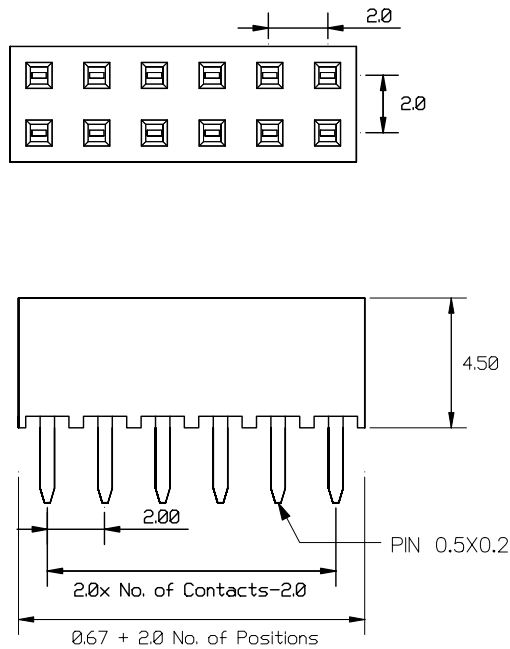



RoHS compliant



Recommended P.C.Board Hole Layout

# SPECIFICATION

Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Plastic UL94V-0

Ordering Code:

DFD04A- X - X - X  
 ① ② ③ ④

- ① Series No:
- ② No. of Contact  
04 TO 80
- ③ Contact Plating  
A: Gold Flash  
E: 3u" Gold  
B: 10u" Gold  
C: 15u" Gold  
D: 30u" Gold  
T: Tin Plated
- ④ Code Packing  
A: Tube  
B: Tray

UNLESS OTHERWISE SPECIFIED TOLERANCE	ANG. 0. 0 ±0.25 .00 ±0.2	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25
DRAWN	TITLE: 2.0mm Female Header, Straight Type Profile: 4.5mm	
CHECKED	DRAWN NO: DFD04A-XXX-1	
APPROVED	PRODUCT NO. DFD04A-XXXX	

REV	DESCRIPTION	DATE