


RoHS compliant



SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: Black Liquid Crystal Polymer

Ordering Code:



DFD05- X - X - X
 ① ② ③ ④

① Series No:


② No. of Contact
 04 TO 50

③ Contact Plating
 A: Gold Flash
 E: 3u" Gold
 H: Goldflash / Tin
 I: 5u" Gold / Tin
 J: 10u" Gold / Tin
 K: 15u" Gold / Tin

④ Code Packing
 A: Tube
 B: Tray

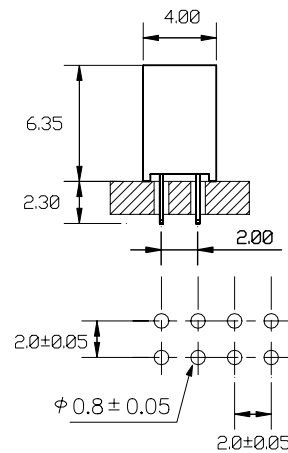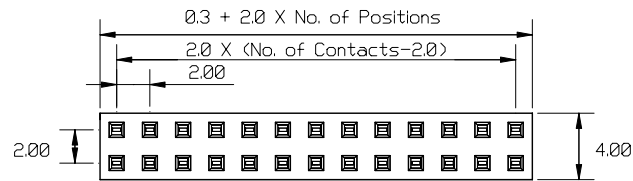

Recommended P.C.Board
 Hole Layout

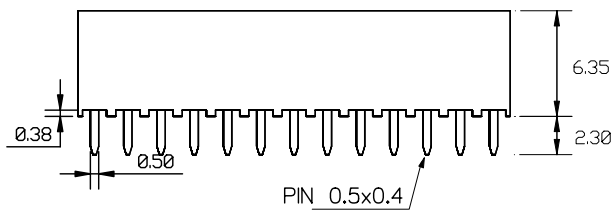

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG.
 0
 0 ±0.25
 .00 ±0.2

SCALE: AS SHOWN UNIT: mm

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
 Tel: +49 (0)711 / 358 110 20 | Fax: +49 (0)711 / 358 110 25

DRAWN
 CHECKED
 APPROVED

TITLE:
 2.0mm Female Header, Straight Type
 Profile: 6.35mm
 DRAWN NO: DFD05-XXX-1
 PRODUCT NO. DFD05-XXX

REV	DESCRIPTION	DATE