

RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0

Ordering Code:

DFR02- X - X - X - X
 ① ② ③ ④ ⑤

① Series No:

② No. of Contact

A: 03 TO 40

B: 04 TO 80

③ Row Type

A: Single Row

B: Dual Row

④ Contact Plating

A: Gold Flash

E: 3u" Gold







B: 10u" Gold

C: 15u" Gold


D: 30u" Gold

⑤ Code Packing

A: Tube

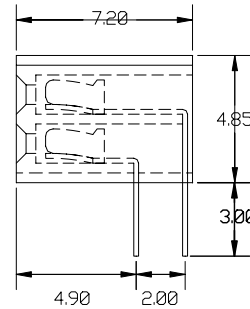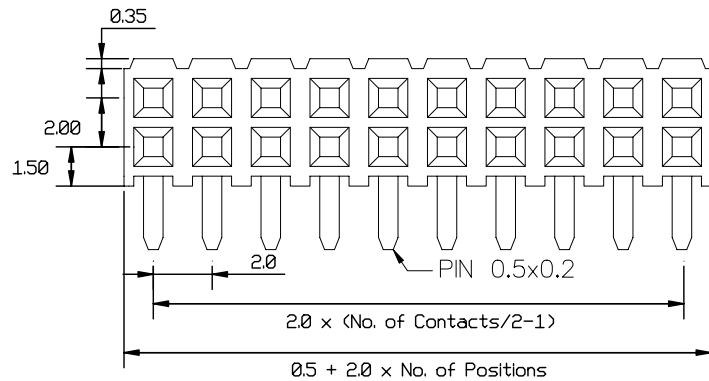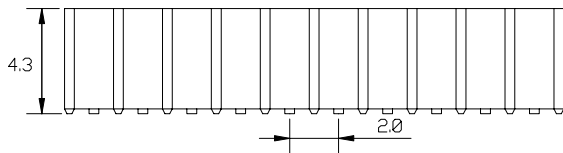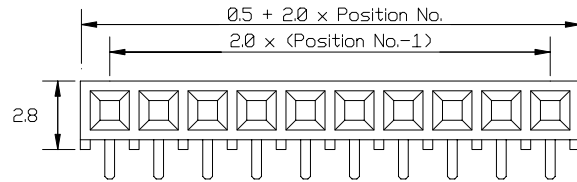

Recommended P.C.Board Hole Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel: +49 (0)711 / 358 110 20 Fax: +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 2.0mm Female Header, Right Angle Type
DRAWN	CHECKED	DRAWN NO: DFR02-XXX-1
APPROVED	DATE	PRODUCT NO. DFR02-XXX

REV	DESCRIPTION	DATE