

RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic
 UL94V-0





Processing

Max Processing Temp: 260 ° C for 6 seconds
 SMT Lead Coplanarity:
 (0.10mm),004"max (10-50)
 (0.15mm),006"max (52-80)


Ordering Code:

DFS04- X - X - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contact: 04 TO 80
- ③ Contact Plating: A: Gold Flash, B: 10u" Gold, C: 15u" Gold, D: 30u" Gold, T: Tin Plated, E: 3u" Gold
- ④ Special Function: 0: W/O Locating Peg, 1: With Locating Peg
- ⑤ Code Packing: A: Tube, B: Pad+Tube, C: Pad+T&R

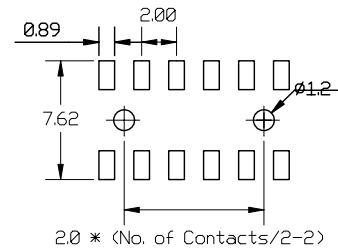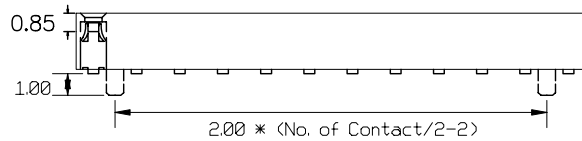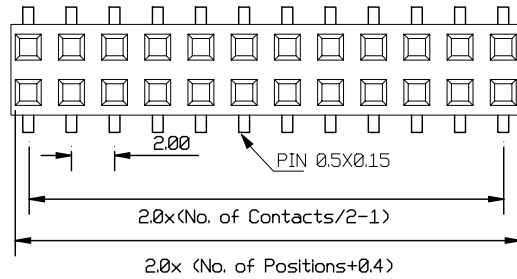

Recommended P.C.Board SMT Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>
ANG. 0. .0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 2.0mm Female Header, SMT Type Profile: 2.8mm DRAWN NO: DFS04-XXXX-1 PRODUCT NO. DFS04-XXXX
DRAWN		
CHECKED		
APPROVED		
REV	DESCRIPTION	DATE